



Enjoy it.

Built-in appliances 2023/2024





7



Durability and professional service: That's the Blaupunkt promise. Of course, this also applies to our 16 products, which already come with a 5-year warranty*. For all other Blaupunkt appliances, there is an optional extended warranty available for a small fee. In order to activate the 5-year warranty, products must be registered online within 90 days.

Just three easy steps to the warranty extension.





Create a customer account

Fill out the contact form on our website www.blaupunkt-einbaugeraete.com (or scan the QR code above). Then confirm your e-mail address to complete the registration.



Register your new appliance

You can register your new kitchen appliance in the customer area under *My appliances*.



Complete your registration

Enter the serial number and date of purchase and select the device category. That's it! Now you can benefit from your customer advantages.



*Registration within 90 days is required to activate the 5-year warranty.

For more information, please visit our website www.blaupunkt-einbaugeraete.com.



The Dark Steel series presents itself in a coherent and consistent design. The appliances are carefully aligned to create you a comfortable kitchen space. Ovens and compact appliances can be combined in various ways – along clear, uniform lines of design with black glass and white displays.



Heat 13

Built-in oven with microwave

EG 1297



- Voltage: 230 V
- Total connected load: 2.9 kW
- 800 W Microwave
- Grill output: 2,200 W/hot air output: 1,800 W

Built-in electric oven with 12 heating types:

- Top/bottom heat
- Bottom heat
- Hot air
- Circulation
- Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level
- Defrost function
- Dough process
- Microwave with 5 power levels: 80 W, 240 W, 400 W, 560 W, 800 W
- Combined operation

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation
- 16 automatic programmes
- Electronic temperature regulation from 30 °C 250 °C
- Full glass inner door
- Dark Steel metal handle with logo
- Cooking chamber volume 721
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- LED oven lighting
- Safety switch-offChild protection
- Cooling fan

- Combination grate
- Enamelled baking tray

- Appliance dimensions: 59.5 × 59.5 × 56.5 cm
- Installation dimensions: 60.0 × 56.0 × 55.0 cm
- Panel height: 96 mm



Built-in oven with steam function

EG 1298



- Energy efficiency class: A+
- Voltage: 220 240 V
- Total connected load: 3.15 kW

- Built-in electric oven with 12 heating types:
- Top/bottom heat
- Bottom heat
- Hot Air Eco • Hot air
- Circulation
- Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level
- Defrost function
- Dough process
- Steam support

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Push & pull water tank
- Temperature sensor
- Quick heating
- Temperature recommendation
- 13 automatic programmes
- Electronic temperature regulation from 30 °C 250 °C
- Full glass inner door
- Soft-moving door
- Dark Steel metal handle with logo
- Cooking chamber volume 721
- Flat oven walls with oven racksEnamelled cooking chamber
- Removable oven door for easy cleaning
- LED oven lightingSafety switch-off
- Child protection
- Large oven interior with 1-way telescopic extension

- AccessoriesCombination grate
- Enamelled baking tray
- Temperature sensor

- Appliance dimensions: 59.5 × 59.5 × 56.5 cm
- Installation dimensions: $60.0 \times 56.0 \times 55.0 \,\text{cm}$
- Panel height: 96 mm



Built-in oven with pyrolysis

5B50P 8690GB New

EG 1266



- Energy efficiency class: A+
- Voltage: 220 240 V
- Total connected load: 3.2 kW

Built-in electric oven with 12 heating types:

- Top/bottom heat
- Bottom heat Hot Air Eco
- Hot air
- Circulation
- Circulation grill
- Vario large area grill Vario small area grill
- Pizza level
- Defrost function
- Dough process Air Fry function

- Control panel in Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation
- Automatic programmes
- Electronic temperature regulation from 30 °C 250 °C
- Pyrolytic self-cleaningFull glass inner door
- Soft-moving door
- Metal handle in Dark Steel with logo
- Cooking chamber volume 721Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting Safety switch-off
- Child protection, door lock in pyrolysis mode
- Large oven interior with 1-way telescopic extension

- Combination grate
- Enamelled baking tray
- Temperature sensor • Air Fry insert

- Appliance dimensions: 59.5 × 59.5 × 56.5 cm
- Installation dimensions: 60.0 × 56.0 × 55.0 cm
- Panel height: 96 mm



Built-in oven

5B50N 8690GB New

EG 1254



- Energy efficiency class: A+
- Voltage: 220 240 V
- Total connected load: 2.9 kW

Built-in electric oven with 12 heating types:

- Top/bottom heat Bottom heat
- Hot Air Eco

• Hot air

- Circulation
- Circulation grill • Vario large area grill
- Vario small area grill • Pizza level
- Defrost function Dough process

Air Fry function

- Control panel in Dark Steel design • Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation Automatic programmes
- Electronic temperature regulation from 30 °C 250 °C
- Full glass inner door
- Soft-moving door Metal handle in Dark Steel with logo
- Cooking chamber volume 721
- Flat oven walls with oven racksEnamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off • Child protection, door lock in pyrolysis mode

• Large oven interior with 1-way telescopic extension

- Cooling fan
- Combination grate • Enamelled baking tray
- Air Fry insert

- Appliance dimensions: 59.5 × 59.5 × 56.5 cm
- Installation dimensions: 60.0 × 56.0 × 55.0 cm
- Panel height: 96 mm



In a range from:

on the 5-year warranty,

Heat 15

Dark Steel

Combination steam cooker

EG 1595



- Voltage: 220 240 V
- Total connected load: 3.0 kW
- Grill output: 2,200 W/hot air output: 1,700 W

Compact oven with 13 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Circulation
- Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level Defrost function
- Dough process
- Steam cooking from 35°C 100°C
- Combined operation

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Push & pull water tank
- Temperature sensor
- Ouick heating
- Temperature recommendation
- 16 automatic programmes
- Electronic temperature regulation from 30 °C 250 °C
- Full glass inner door
- Dark Steel metal handle with logo
- Cooking chamber volume 501
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- LED oven lightingSafety switch-off
- Child protection
- Cooling fan

- Combination grate
- Enamelled baking tray
- XL steam cooking container, perforated
- Temperature sensor

- Dimensions H × W × D

 Appliance dimensions: 45.4 × 59.5 × 56.8 cm
- Installation dimensions: $45.0 \times 56.0 \times 55.0$ cm
- Panel height: 96 mm



Built-in compact microwave oven

EG 1594



- Voltage: 230 V
- Total connected load: 3.0 kW
- 900 W Microwave
- Grill output: 2,200 W/hot air output: 1,700 W

Compact oven with 10 heating types:

- Top/bottom heat
- Bottom heat
- Hot air
- Circulation
- Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level
- Microwave with 5 power levels: 100 W, 300 W, 500 W, 700 W, 900 W
- Combined operation

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation
- 13 automatic programmes
- Electronic temperature regulation from 30 °C 250 °C
- Full glass inner door
- Dark Steel metal handle with logo
- Cooking chamber volume 501
- Flat oven walls with oven racks
- Enamelled cooking chamberRemovable oven door for easy cleaning
- LED oven lighting
- Safety switch-off
- Child protection
- Cooling fan

- Combination grate
- Enamelled baking tray
- Glass pan

- Appliance dimensions: 45.4 × 59.5 × 56.8 cm
- Installation dimensions: 45.0 × 56.0 × 55.0 cm
- Panel height: 96 mm



Built-in microwave with hot air

5M60M 8690GB New

EG 1516



- Voltage: 230 V
- Total connected load: 2.3 kW
- 900 W Microwave
- Grill output: 1,100 W/hot air output: 2,300 W

- Oven type, heating type
 Built-in microwave with 3 heating types:
- Hot air
- Circulation grill
- Defrost function
- Microwave with 5 power levels: 100 W, 300 W, 500 W, 700 W, 900 W
- Combined operation
- Quick cooking function
- Automatic programmes


- Control panel in Dark Steel design
- Touch Control Smart Slider
- Digital display in white
- Full glass inner door
- Metal handle in Dark Steel with logo
- Cooking chamber volume 341 Enamelled cooking chamber
- Removable oven door for easy cleaning
- LED oven lighting

Safety switch-offChild lock

- Glass turntable • Round combination grate

- Appliance dimensions: $38.2 \times 59.5 \times 46.6 \, \text{cm}$ • Installation dimensions: $38.0 \times 56.0 \times 55.0$ cm
- Panel height: 81 mm

Warming drawer









- Voltage: 220 240 V
- Total connected load: 0.4 kW

- Heating by fan heater
- Temperature regulation in 3 levels: from 30°C 80°C

 20.51 interior volume
- Rotary switch on inside

- Black glass front • Opens without handles by push & pull
- Telescopic full extension
- Anti-slip mat
- Dish pre-heatingFood warm-keeping function
- Defrosting of frozen food • Load capacity 15 kg

- Appliance dimensions: 14.0 × 59.4 × 54.2 cm • Installation dimensions: 14.0 × 56.0 – 56.8 × 55.0 cm











OVENS

Crispy, delicate and fresh – all available with a simple touch! Intuitive operating concepts and clearly arranged display solutions allow your oven to produce perfect results. And when the feast is over, these practical kitchen appliances simply clean themselves.

Heat

Built-in oven with pyrolysis

EG 1274



- Energy efficiency class: A
- Voltage: 220 240 V
- Total connected load: 3.2 kW

Built-in electric oven with 8 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Hot air grill
- Vario large area grill
- Vario small area grill
- Defrost function

- Design, comfort
 Fully retractable control knob
- Digital display Electronic clock
- Quick heating
- Temperature recommendation Pyrolytic self-cleaning
- Full glass inner door
- Metal handle
- Cooking chamber volume 701
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode
- Cooling fan
- Large oven interior with 1-way telescopic extension

- Enamelled baking tray
- Combination grate

- Appliance dimensions: $59.5 \times 59.5 \times 57.5$ cm
- Installation dimensions: $59.0 \times 56.0 \times 55.0 \text{ cm}$
- Panel height: 96 mm

Built-in oven

EG 1234



- Energy efficiency class: A
- Voltage: 220 240 V
- Total connected load: 3.0 kW

Built-in electric oven with 8 heating types:

- Top / bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Hot air grill
- Vario large area grill
- Vario small area grill
- Defrost function

- Design, comfort
 Fully retractable control knob
- Digital display
- Electronic clock
- Quick heating
- Temperature recommendation
- Full glass inner door
- Metal handle
- Cooking chamber volume 701
- Flat oven walls with oven racks
- Enamelled cooking chamber Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Large oven interior with 1-way telescopic extensiong

- Enamelled baking tray
- Combination grate

- Appliance dimensions: $59.5 \times 59.5 \times 57.5$ cm
- Installation dimensions: $59.0 \times 56.0 \times 55.0$ cm
- Panel height: 96 mm

Built-in oven

5B30N 0250GB New

EG 1226







- Energy efficiency class: A
- Voltage: 220 240 V
- Total connected load: 3.0 kW

Built-in electric oven with 8 heating types:

- Top/bottom heatBottom heat
- Hot Air Eco
- Hot air
- Hot air grill
- Vario large area grill Vario small area grill
- Defrost function


- Design, comfort
 Fully retractable control knob
- Digital display
- Electronic clock
- Quick heating
- Temperature recommendation
- Full glass inner door
- Metal handle
- Cooking chamber volume 701
- Flat oven walls with oven racks
- Enamelled cooking chamberRemovable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Cooling fan • Large oven interior with 1-way telescopic extension

- Enamelled baking tray
- Combination grate

- Appliance dimensions: $59.5 \times 59.5 \times 57.5$ cm
- Installation dimensions: $59.0 \times 56.0 \times 55.0$ cm
- Panel height: 96 mm





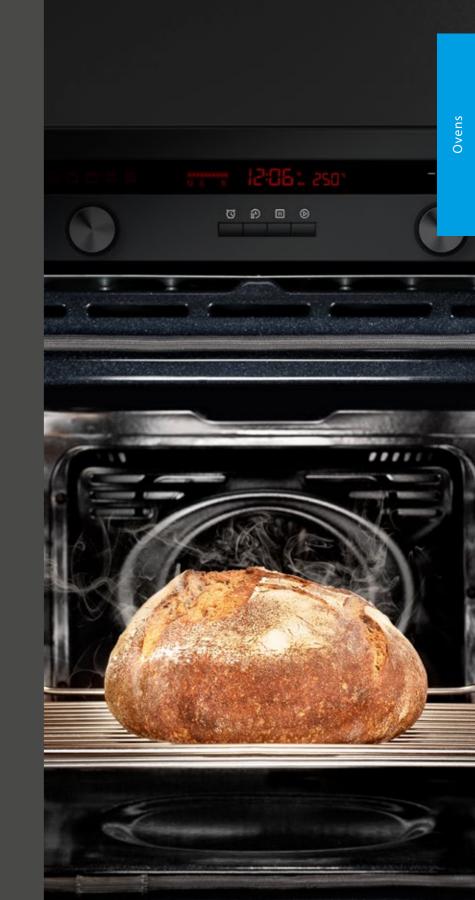

Built-in oven with pyrolysis

EG 1271





- Energy efficiency class: A
- Voltage: 220 240 V
- Total connected load: 3.25 kW

Built-in electric oven with 7 heating types:

- Top/bottom heat Bottom heat
- Hot Air Eco
- Hot air
- Circulation grill
- Vario large area grill
- Pizza level

- Fully retractable control knob
- Digital display
- Electronic clock
- Ouick heating
- Temperature recommendation
- Automatic programmes: 10 programmes
- Electronic temperature regulation from 30 °C 275 °C
- Pyrolytic self-cleaning
- Full glass inner door
- Metal handle
- Extremely low window temperature, max. 30 °C
 Cooking chamber volume 63 l
- Enamelled cooking chamber
- Flat oven walls with oven racks
- Removable oven door for easy cleaning Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode
- Cooling fan

- Combination grate
- Universal pan

- Appliance dimensions: $59.5 \times 59.4 \times 54.8$ cm • Installation dimensions: $59.7 \times 56.0 \times 55.0$ cm
- Panel height: 115 mm

Built-in oven

EG 1224



&

- Energy efficiency class: A
- Voltage: 220 240 V
- Total connected load: 3.3 kW

Built-in electric oven with 5 heating types:

- Top/bottom heat
- Hot Air Eco
- Hot air
- Circulation grill
- Vario large area grill

- Quick heating
- Temperature regulation from 50°C 275°C
- Full glass inner door
- Low window temperature, max. 50 °C
- Cooking chamber volume 661
- Flat oven walls with oven racks
- Enamelled cooking chamberRemovable oven door for easy cleaning
- Oven lighting
- Cooling fan
- Control lamp for operation condition

- Combination grate
- Universal pan

- Appliance dimensions: 59.5 × 59.4 × 54.8 cm
 Installation dimensions: 59.7 × 56.0 × 55.0 cm
- Panel height: 115 mm

Built-in oven

EG 1223



- Energy efficiency class: A
- Voltage: 220 240 V
- Total connected load: 3.3 kW

Built-in electric oven with 5 heating types:

- Top/bottom heat
- Hot Air Eco
- Hot air
- Circulation grill
- Vario large area grill

- Quick heating
- Temperature regulation from 50 °C 275 °C
- Full glass inner door
- Low window temperature, max. 50 °C
- Cooking chamber volume 661
- Flat oven walls with oven racks
- Enamelled cooking chamberRemovable oven door for easy cleaning
- Oven lighting
- Cooling fan
- Control lamp for operation condition

- Combination grate
- Universal pan

- Appliance dimensions: $59.5 \times 59.4 \times 54.8 \, \text{cm}$
- Installation dimensions: $59.7 \times 56.0 \times 55.0 \, \text{cm}$
- Panel height: 115 mm

Built-in oven

EG 1222

®



- Energy efficiency class: A
- Voltage: 220 240 V
- Total connected load: 2.85 kW

Built-in electric oven with 5 heating types:

- Top/bottom heat
- Bottom heat
- Top/bottom heat
- Vario large area grill
- Vario small area grill

• Temperature regulation from 50°C – 275°C

- Full glass inner door
- Metal handle
- Low window temperature, max. 50°C
 Cooking chamber volume 711
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Cooling fan
- Control lamp for operation condition

- Combination grate
- Universal pan

- Appliance dimensions: 59.5 × 59.4 × 54.8 cm
- Installation dimensions: $59.7 \times 56.0 \times 55.0 \, \text{cm}$
- Panel height: 115 mm









EG 1449















- Connected load: 2.45 kW
- 900 W Microwave
- Grill output: 1,000 W

- Built-in appliance for a 60 cm wide tall cupboard
- Heating types: microwave, grill, combined microwave and grill
- Control panel made of glassEasy-to-use electronics
- 5 output levels: 900 W, 600 W, 360 W, 180 W, 90 W
- Programmes mode for 8 programmes
- Automatic weight adjustment for defrost programmes
- Digital display
 Digital clock with day display
- 25 l stainless steel cooking chamberl
- Cooking chamber lighting
- 31.5 cm glass turntableChild protection
- Door hinged on the left

- Appliance dimensions: $38.2 \times 59.4 \times 40.3$ cm
- Installation dimensions: $35.7 \times 56.0 \times 38.3$ cm

Built-in microwave













- Connected load: 1.05 kW
- 700 W Microwave

- Design, comfort

 Built-in appliance with matching built-in frame for a 60 cm wide wall unit
- Control panel made of Stainless Steel
- Easy-to-use electronics
 Programmes mode for 8 programmes
 Digital display
- Digital clock with time display
- 17 I stainless steel cooking chamber
- Cooking chamber lighting
- 24.5 cm glass turntable
- Child protection
- Door hinged on the left

- Dimensions H × W × D

 Appliance dimensions: 38.8 × 59.4 × 31.9 cm • Installation dimensions: $38.0 \times 56.0 \times 30.0$ cm









Stand-alone hob, combi induction

5|| 84353 New

SLIM DESIGN FRAME















- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 2 cooking zones, combi induction, \emptyset 20.0 cm \times 21.0 cm, 2.1 kW (3.0 kW)
- 2 cooking zones, combi induction, \emptyset 20.0 cm \times 21.0 cm, 2.1 kW (3.0 kW)

- Aluminium frame
- Multi Control • Smart Slider
- Touch Control
- 2× combi induction
- Flexible linking two cooking zones can be combined into one cooking zone
- Boost function for all induction cooking zones
- Grill function
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock
- Timer can be set simultaneously for each cooking zone
- Countdown function
- Quick start function
- Recall function to repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Quick assembly system

- Appliance dimensions: $5.8 \times 78.4 \times 52.4$ cm
- Installation dimensions: $5.2 \times 75.0 \times 49.0$ cm

Stand-alone hob, combi induction

EG 1364


















- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones:
- 2 cooking zones, combi induction, Ø 21.0 cm, 2.2 kW (3.7 kW)
- 2 cooking zones, combi induction, Ø 21.0 cm, 2.2 kW (3.7 kW)

- Stainless-steel frame
- Touch Control
- Combi induction
- Boost function for all induction cooking zones
- Electronic control in 17 power levels Connectible warm-keeping function
- for combi zone
- Digital display of cooking levels
- 2-level residual heat display for each cooking zone
- Main switch
- Pot detection
- Child protection
- Quick start function
- Restart function Safety switch-off

• Power management

- Appliance dimensions: $5.5 \times 58.3 \times 51.3$ cm
- Installation dimensions:
- $5.5 \times 56.0 \times 49.0 50.0 \, \text{cm}$

Stand-alone hob, induction













- Voltage: 220 240 V
- Total connected load: 4.6 kW
- 4 induction cooking zones:
- 2 cooking zones Ø 18.0 cm, 1.8 kW (3.1 kW)
- 1 cooking zones Ø 14.5 cm, 1.4 kW (2.2 kW)
- 1 cooking zone Ø 21.0 cm, 2.2 kW (3.7 kW)

- Design, comfort


 Stainless-steel frame
- Touch Control
- Boost function for all induction cooking zones
- Electronic control in 17 power levels
- Digital display of the cooking level
- 2-level residual heat display for each cooking zone
- Main switch
- Pot detection
- Child protection • Quick start function
- Restart function
- Safety switch-off
- Power management

- Appliance dimensions: $5.5 \times 58.3 \times 51.3$ cm
- Installation dimensions:
- $5.5 \times 56.0 \times 49.0 50.0 \, \text{cm}$







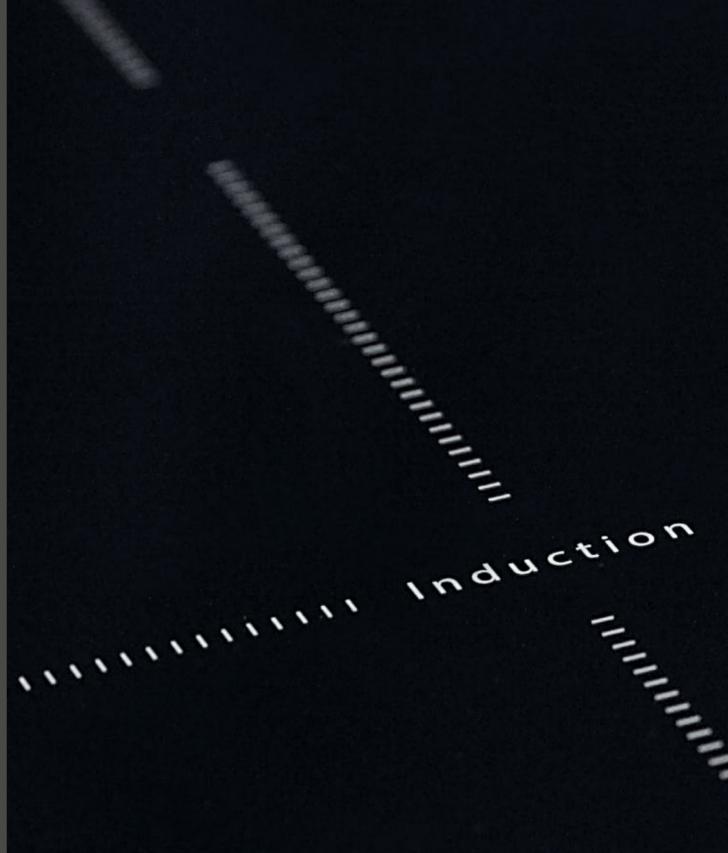

5|| 86250 New

EG 1387
















- Voltage: 220 240 V
- Total connected load: 11.1 kW
- 6 induction cooking zones with double booster:
- 6 cooking zones Ø 22.0 \times 18.0 cm, 2.1 kW (2.65 kW/3.7 kW)

Design, comfort

- Frameless
- Multi Control
- Smart Slider Touch Control
- 3× combi induction
- Flexible linking two cooking zones can be combined into one cooking zone
- Double boost function for all induction cooking
- Toggle function with fixed temperatures (42°C, 70°C and 94°C)
- Cooking Chef mode
- Grill function
- Electronic control in 9 + 2 power levels
- Digital display of cooking levels in white
- Residual heat display for each cooking zone
- Permanent pot detection (across all zones)
- Child lock
- Timer can be set simultaneously for each cooking zone
- Countdown function
- Quick start function
- Recall function to repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system


Dimensions H × W × D

- Appliance dimensions: $4.6 \times 78.0 \times 52.0$ cm
- Installation dimensions: 4.6 × 75.0 × 49.0 cm

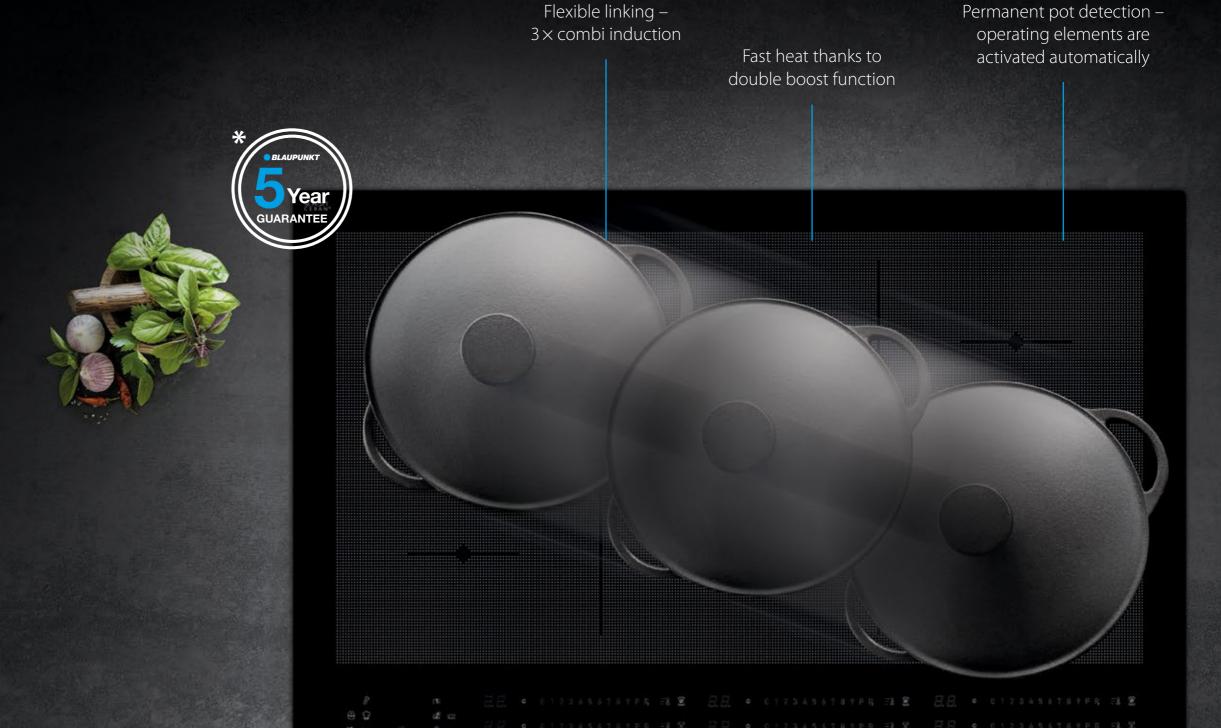



BLAUPUNKT



Stand-alone hob, combi induction

EG 1383










- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 5 induction cooking zones with booster:
- 2 cooking zones, combi induction Ø 20.0 × 21.0 cm, 2.3 kW (3.0 kW)
- 2 cooking zones, combi induction
- \emptyset 20.0 × 21.0 cm, 2.3 kW (3.0 kW)
- 1 cooking zone Ø 21.5 cm, 2.3 kW (3.0 kW)

- Frameless • Multi Control
- Smart Slider
- Touch Control
- 2× combi induction
- Flexible linking Any two cooking zones
- can be combined into one cooking zone
- Boost function for all induction cooking zones
- Grill function
- Electronic control in 10 power levels
- Digital display of cooking levels in white
- Residual heat display for each cooking zone
- Pot detection
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.2 \times 88.0 \times 52.0$ cm
- Installation dimensions: 5.2 × 81.0 × 49.0 cm

Stand-alone hob, combi induction

EG 1324















- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 2 cooking zones, combi induction Ø 20.0 × 21.0 cm, 2.1 kW (3.0 kW)
- 2 cooking zones, combi induction \emptyset 20.0 × 21.0 cm, 2.1 kW (3.0 kW)

- Frameless
- Multi Control
- Smart Slider
- 2× combi induction
- Flexible linking Any two cooking zones
- can be combined into one cooking zone Boost function for all induction cooking zones
- Grill function
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.2 \times 78.0 \times 52.0 \, \text{cm}$
- Installation dimensions: 5.2 × 75.0 × 49.0 cm

Stand-alone hob, induction

EG 1323















- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 2 cooking zones Ø 17.5 cm, 1.4 kW (2.1 kW)
- 2 cooking zones Ø 21.5 cm, 2.3 kW (3.0 kW)

- Frameless
- Multi Control
- Smart Slider
- Touch Control
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Pot detection
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.2 \times 78.0 \times 52.0$ cm
- Installation dimensions: 5.2 × 75.0 × 49.0 cm

Stand-alone hob, combi induction

EG 1325















- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 2 cooking zones, combi induction Ø 21.0 × 19.0 cm, 2.1 kW (3.0 kW)
- 1 cooking zone Ø 17.5 cm, 1.4 kW (1.85 kW)
- 1 cooking zone Ø 21.5 cm, 2.3 kW (3.0 kW)

- Frameless
- Multi Control
- Smart Slider
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Pot detection
- Child protection • Timer – simultaneously adjustable for each
- cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management • Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: 5.2 × 59.0 × 52.0 cm
- Installation dimensions: 5.2 × 56.0 × 49.0 cm

Stand-alone hob, induction

EG 1384













- Voltage: 220 240 V
- Total connected load: 6.7 kW
- 3 induction cooking zones with booster:
- 1 cooking zone Ø 17.5 cm, 1.4 kW (2.1 kW) • 1 cooking zone Ø 21.5 cm, 2.3 kW (3.0 kW) • 1 cooking zone Ø 26.5 cm, 2.3 kW (3.0 kW)


- Frameless
- Multi Control
- Smart Slider • Touch Control
- Boost function for all induction cooking zones
- Electronic control in 10 power levels Digital display of cooking levels
- Residual heat display for each cooking zone
- Pot detection
- Child protection • Timer – simultaneously adjustable for each
- cooking zone Countdown function
- Quick start function • Recall function – Repeat the last settings
- Automatic safety switch-off Overflow detection
- Power management • Flush-mounted installation possible

• Quick assembly system

- Appliance dimensions: 5.2 × 59.0 × 52.0 cm
- Installation dimensions: 5.2 × 56.0 × 49.0 cm



















Stand-alone hob, induction

EG 1321















- Voltage: 220 240 V
- Total connected load: 3.7 kW
- 2 induction cooking zones with booster:
- 2 cooking zones Ø 17.5 cm, 1.4 kW (2.1 kW)

- Frameless
- Smart Slider
- Touch Control
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Pot detection
- Child lock
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions:
- 5.2 × 30.0 × 52.0 cm
- Installation dimensions:
- 5.2 × 27.0 × 49.0 cm

Stand-alone hob

5RH 84353 New

EG 1366

















- Voltage: 220 240 V
- Total connected load: 7.0 kW
- 4 high-speed cooking zones:
- 1 cooking zone Ø 14.5/22.0 cm, 1.0 kW (2.2 kW) double ring zone
- 1 cooking zone Ø 18.0/27.5 cm,
- 1.5 kW (2.4 kW) casserole zone
- 2 cooking zones Ø 15.5 cm, 1.2 kW

- Aluminium frame
- Touch Control
- Sensor button for zone extension
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Timer can be set simultaneously for each cooking zone
- Automatic safety switch-off
- Overflow detection
- Quick assembly system

- Appliance dimensions: 6.3 × 78.4 × 52.4 cm
- Installation dimensions: 5.7 × 75.0 × 49.0 cm

Stand-alone hob

EG 1355















- Voltage: 220 240 V
- Total connected load: 6.7 kW
- 4 high-speed cooking zones:
- 1 cooking zone Ø 12.0/21.0 cm,
- 0.75/2.2kW double ring zone
- 2 cooking zones each Ø 14.5 cm, 1.2 kW
- 1 cooking zone Ø 17.0/26.5 cm, 1.8/2.6 kW casserole zone

- Stainless-steel frame
- Touch Control
- Sensor button for zone extension
- Electronic control in 17 power levels
- 7-segment display
- 2-level residual heat display for each cooking zone
- Child protection
- Safety switch-off
- Restart function • Control lamp for operation condition
- Main switch

- Appliance dimensions: 5.1 × 58.3 × 51.3 cm
- Installation dimensions: 4.8 × 56.0 × 49.0 50.0 cm

Stand-alone hob









- Voltage: 220 240 V
- Total connected load: 6.6 kW
- 4 high-speed cooking zones:
- 2 cooking zones each Ø 14.5 cm, 1.2 kW
 1 cooking zone Ø 18.0 cm, 2.0 kW
- 1 cooking zone Ø 21.0 cm, 2.2 kW

- Design, comfort

 Stainless-steel frame
- Touch Control • Electronic control in 17 power levels
- 7-segment display2-level residual heat display for each cooking zone
- Child protection
- Safety switch-off
- Restart function
- Control lamp for operation condition
- Main switch

- Appliance dimensions: $5.1 \times 58.3 \times 51.3$ cm
- Installation dimensions: 4.8 × 56.0 × 49.0 50.0 cm









Stand-alone hob

EG 1360













- Voltage: 220 240 V
- Total connected load: 7.0 kW
- 4 high-speed cooking zones:
- 1 cooking zone Ø 14.5/22.0 cm,
- 1.0 kW (2.2 kW) double ring zone
- 1 cooking zone Ø 18.0/27.5 cm, 1.5 kW (2.4 kW) casserole zone
- 2 cooking zones Ø 15.5 cm, 1.2 kW

Frameless

- Touch Control
- Sensor button for zone extension
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock
- Timer simultaneously adjustable for each cooking zone
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.7 \times 78.0 \times 52.0$ cm
- Installation dimensions: 5.7 × 75.0 × 49.0 cm

Stand-alone hob

EG 1359













- Voltage: 220 240 V
- Total connected load: 7.0 kW
- 4 high-speed cooking zones:
- 1 cooking zone Ø 14.5/22.0 cm, 1.0 kW (2.2 kW) double ring zone
- 1 cooking zone Ø 18.0/27.5 cm,
- 1.5 kW (2.4 kW) casserole zone
- 2 cooking zones Ø 15.5 cm, 1.2 kW

Frameless

- Touch Control
- Sensor button for zone extension
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Timer simultaneously adjustable for each cooking zone
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.7 \times 59.0 \times 52.0$ cm
- Installation dimensions: 5.7 × 56.0 × 49.0 cm

Stand-alone hob

EG 1358













- Voltage: 220 240 V
- Total connected load: 6.0 kW
- 4 high-speed cooking zones:
- 2 cooking zones Ø 15.5 cm, 1.2 kW
- 2 cooking zones Ø 19.0 cm, 1.8 kW

- Frameless
- Touch Control
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.7 \times 59.0 \times 52.0$ cm
- Installation dimensions: $5.7 \times 56.0 \times 49.0 \, \text{cm}$

Stand-alone hob









- Voltage: 220 240 V
- Total connected load: 3.0 kW
- 2 high-speed cooking zones:
- 1 cooking zone Ø 14.5 cm, 1.2 kW 1 cooking zone Ø 18.0 cm, 1.8 kW

- Frameless
- Touch Control
- Electronic control in 9 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.7 \times 29.0 \times 52.0$ cm
- Installation dimensions: 5.7 × 27.0 × 49.0 cm









GAS HOBS

Change the temperature at lightning speed – cooking on an open flame is direct, emotional and, thanks to the latest technology, completely safe. A Blaupunkt gas hob is an eye-catcher in the kitchen and delivers a truly professional cooking experience.



Gas hob

EG 1342



- Connected load, gas: 8.1 kW
- Burner with 4 cooking areas: • 2 normal burners 1.75 kW
- 1 energy-saving burner 1.0 kW
- 1 triple burner 3.6 kW

- Black glass, hardened
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas
- (not included in the scope of delivery) • Connection cable 1 m

- Appliance dimensions: $9.0 \times 60.0 \times 51.5$ cm
- Installation dimensions: 56.0 × 49.0 cm

Gas hob

EG 1343

460▶



- Connected load, gas: 11.1 kW
- Burner with 5 cooking areas:
- 2 normal burners 1.75 kW
- 1 energy-saving burner 1.0 kW
- 1 triple burner 3.6 kW

• 1 strong burner 3.0 kW

- Black glass, hardened
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas
- (not included in the scope of delivery)
- Connection cable 1 m

- Appliance dimensions: $9.0 \times 75.0 \times 52.0 \, \text{cm}$
- Installation dimensions: 56.0 × 49.0 cm

Gas hob

EG 1340

√75▶



- Connected load, gas: 8.1 kW Burner with 4 cooking areas:
- 2 normal burners 1.75 kW
- 1 energy-saving burner 1.0 kW
- 1 triple burner 3.6 kW

Design, comfort • Stainless steel

- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas
- (thermoelectric safety pilot) • Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas
- (not included in the scope of delivery)
- Connection cable 1 m

- Appliance dimensions: $9.0 \times 59.0 \times 51.0$ cm
- Installation dimensions: 56.0 × 49.0 cm

Gas hob

EG 1341

460▶



- Connected load, gas: 11.1 kW Burner with 5 cooking areas:
- 2 normal burners 1.75 kW
- 1 energy-saving burner 1.0 kW
- 1 triple burner 3.6 kW
- 1 strong burner 3.0 kW

- Stainless steel
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas (thermoelectric safety pilot)
- Preset to natural gas (20 mbar)
- Convertible to liquid gas
- (not included in the scope of delivery)
- Connection cable 1 m

- Appliance dimensions: $9.0 \times 75.0 \times 51.0$ cm
- Installation dimensions: 56.0 × 49.0 cm









HOBS WITH INTEGRATED EXTRACTOR

The modern extractor solution offers one thing above all – more freedom: A clear view, as the fumes are extracted directly where they arise. Odourless cooking and more freedom in kitchen planning.

High-quality filter systems allow nothing but fresh air to be produced, while still being powerful and noise-free. The perfect combination of heat and air in a single appliance.





Flexible

planning – surface-

or flush-mounting

installation possible

EXCELLENT PRODUCT

"The induction hob 5IX 80290 features many innovative functions that allow both flexible cooking and grilling. The innovative extractor fan is particularly impressive", said the jury.



Simple and intuitive operation

The ventilation

system is activated

automatically when a

cooking zone is in use

Fan motor integrated directly into the hob

Simple filter

exchange and

easy cleaning

State-of-the-art technology and fast installation

2 in 1 – Exhaust and circulating air in one device


> Minimalist design



Here you can find all information about our hob fans

Stand-alone hob, combi induction with integrated extractor fan

EG 1363

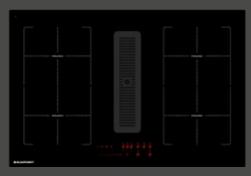



winner 2023



















- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 4 cooking zones Ø 19.0 × 21.0 cm, 2.1 kW (3.7 kW)

- Frameless
- Multi Control
- Smart Slider
- Touch Control
- 2× combi induction
- Flexible linking Any two cooking zones can be combined into one cooking zone
- Boost function for all induction cooking zones
- Grill function
- Cooking Chef Mode
- Electronic control in 11 power levels
- Digital display of cooking levels in red
- Residual heat display for each cooking zone
- Pot detection
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $20.1 \times 78.0 \times 52.0$ cm
- Installation dimensions: $19.7 \times 75.0 \times 50.0 \, \text{cm}$

- Voltage: 220 240 V
- Total connected load: 163 W
- Energy efficiency class: A
- Average power consumption: 31.2 kWh/year
- Fan efficiency class: A
- Grease filter efficiency class: A
- Noise min./max. Normal level/Intensive level:
- Min. 34 dB (A) Max. 69 dB (A) Max. 72 dB (A)
- Fan output max. Normal level / Intensive level*:
- In extraction mode 434 m³/h/500 m³/h • In circulation mode 350 m³/h/400 m³/h

- Suitable for installation in a kitchenette or kitchen island
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- 10-level fan output controllable via Touch Control

- by LED control lamp
- The device automatically blocks after 30 hours of operation for filter cleaning
- Powerful and quiet blower
- The ventilation system is activated automatically when a cooking zone is in use

• Grease filter insert with mesh fabric, dishwasher-safe

- With fan motor integrated into the hob

- 9 power levels + 1 intensive level
- Intensive level with automatic reset for extraction mode
- Automatic blower overrun
- Metal grease filter and carbon filter saturation indication

• Electronic control in 11 power levels • Digital display of cooking levels in red

• Boost function for all induction cooking zones

- Residual heat display for each cooking zone
- Pot detection

Frameless

• Multi Control

• Smart Slider

• Touch Control

- Child protection • Timer – simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: 20.1 × 59.0 × 52.0 cm
- Installation dimensions: 19.7 × 59.0 × 50.0 cm

- Voltage: 220 240 V
- Total connected load: 165 W
- Energy efficiency class: B
- Average power consumption: 33.2 kWh/year
- Fan efficiency class: B
- Grease filter efficiency class: A

Noise min./max. Normal level/Intensive level:

- Min. 34 dB (A) Max. 69 dB (A) Max. 72 dB (A)
- Fan output max. Normal level/Intensive level*:
- In extraction mode 424 m³/h/441 m³/h • In circulation mode 339 m³/h/353 m³/h

Stand-alone hob, combi induction with integrated extractor fan

EG 1362







• Total connected load: 7.4 kW

• Voltage: 220 – 240 V



4 induction cooking zones with booster:

• 2 cooking zones Ø 16 cm, 1.4 kW (1.85 kW)

• 2 cooking zone Ø 17.5 cm, 1.4 kW (2.1 kW)













- With fan motor integrated into the hob
- Suitable for installation in a kitchenette or kitchen island
- Optional extraction or circulation mode (carbon filter
- required for circulation mode) • 10-level fan output controllable via Touch Control
- 9 power levels + 1 intensive level
- Intensive level with automatic reset for extraction mode
- Automatic blower overrun
- Metal grease filter and carbon filter saturation indication by LED control lamp
- The device automatically blocks after 30 hours of operation for filter cleaning
- Powerful and quiet blower
- The ventilation system is activated automatically when a cooking zone is in use

• Grease filter insert with mesh fabric, dishwasher-safe



In a range from: A+++ to D








Stand-alone hob, combi induction with integrated extractor fan

EG 1349

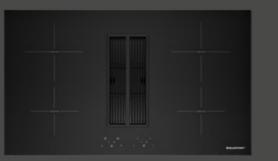

- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 2 cooking zones Ø 16.0 cm, 1.2 kW (1.4 kW)
- 2 cooking zones Ø 20.0 cm, 2.3 kW (3.0 kW)

Design, comfort – hob • Frameless

- Touch Control
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Automatic safety switch-off
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Pot detection
- Child lock
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Power management
- Flush-mounted installation possible

- Appliance dimensions: $82.0 97.5 \times 90.0 \times 53.0$ cm
- Installation dimensions: 16.0 16.4 × 88.0 × 50.0 cm

- Voltage: 220 240 V
- Total connected load: 160 W
- Energy efficiency class: A
- Average power consumption: 52.2 kWh/year
- Fan efficiency class: A
- Grease filter efficiency class: B

Noise min./max. intensive level/normal level:

• Min. 56 dB (A) Max. 70 dB (A) Max. 74 dB (A)

Fan output max. Normal level/Intensive level*: • In extraction mode 582 m³/h/674 m³/h

• In circulation mode 460 m³/h/514 m³/h











- Glass ceramic, black
- Suitable for installation in a kitchenette or kitchen island
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- 4-level fan output controllable via Touch Control
- 3 power levels + 1 intensive level
- Intensive level with automatic reset for extraction mode
- Automatic, three-level blower overrun of 5 / 10 and 20 minutes with LED display
- Metal grease filter and carbon filter saturation indication by LED control lamp
- To clean / evacuate the metal grease filter and the water collection tank, the appliance automatically blocks after 40 hours of operation
- Automatic overrun for circulation mode
- Water collection tank: 0.75 litre capacity
- Powerful and quiet blower

• Metal grease filter, dishwasher-safe



In a range from: A+++ to D



Stand-alone hob, combi induction with integrated extractor fan

EG 1395



- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 4 cooking zones Ø 22 cm, 2.1 kW (3.7 kW)

- Frameless
- Smart Slider
- Touch Control
- 2× combi induction
- Flexible linking Any two cooking zones can be combined into one cooking zone
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Automatic safety switch-off
- Digital display of cooking levels in white
- Toggle function with fixed temperatures (40°C, 70°C and 98°C)
- Cooking Chef Mode, Pause and Recall
- Residual heat display
- Pot detection
- Child lock
- Timer
- Countdown function
- Flush-mounted installation possible

- Appliance dimensions: $82.7 98.2 \times 90.0 \times 53.0$ cm
- Installation dimensions: $5.8 \times 86.2 \times 49.5$ cm

- Voltage: 220 240 V
- Total connected load: 165 W
- Energy efficiency class: A+++
- Average power consumption: 30.8 kWh/year
- Fan efficiency class: A
- Grease filter efficiency class: B

Noise min./max. normal level/intensive level:

• Min. 45 dB (A) max. 65 dB (A) max. 70 dB (A)

Fan output max. normal level/intensive level*:

• In extraction mode 576 m³/h/734 m³/h • In circulation mode 450 m³/h/560 m³/h

• Electronic opening of the extractor fan

required for circulation mode)

• 5 power levels + 1 intensive level

20 minutes with LED display

• Automatic overrun for circulation mode

• Water collection tank: 0.75 litre capacity

• Metal grease filter, dishwasher-safe

by LED control lamp

40 hours of operation

• Powerful and quiet blower

• Suitable for installation in a kitchenette or kitchen island

• Intensive level with automatic reset for extraction mode

• Metal grease filter and carbon filter saturation indication

• To clean/evacuate the metal grease filter and the water

collection tank, the appliance automatically blocks after

• Automatic, three-level blower overrun of 5 / 10 and

• Optional extraction or circulation mode (carbon filter


• 6-level fan output controllable via Touch Control

• Glass ceramic, black



Stand-alone hob, combi induction with integrated extractor fan

EG 1397

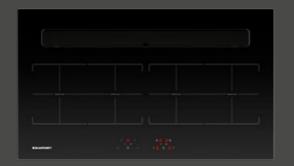

- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 4 cooking zones Ø 19.0 × 21.0 cm, 2.1 kW (3.0 kW)

- Frameless
- Touch Control
- 2× combi induction
- Flexible linking Any two cooking zones can be combined into one cooking zone
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Automatic safety switch-off
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Power management
- Flush-mounted installation possible

- Appliance dimensions: $82.7 98.2 \times 90.0 \times 53.0 \text{ cm}$
- Installation dimensions: 5.8 × 86.2 × 49.5 cm

- Voltage: 220 240 V
- Total connected load: 165 W
- Energy efficiency class: A+++
- Average power consumption: 30.8 kWh/year
- Fan efficiency class: A
- Grease filter efficiency class: B

Noise min./max. intensive level/normal level:

- Min. 45 dB (A) Max. 65 dB (A) Max. 70 dB (A) Fan output max. Normal level / Intensive level*:
- In extraction mode 576 m³/h/734 m³/h
- In circulation mode 450 m³/h/560 m³/h


(E)

- Glass ceramic, black
- Suitable for installation in a kitchenette or kitchen island
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- Electronic opening of the extractor fan
- 6-level fan output controllable via Touch Control
- 5 power levels + 1 intensive level
- Intensive level with automatic reset for extraction mode
- Automatic, three-level blower overrun of 5 / 10 and 20 minutes with LED display
- Metal grease filter and carbon filter saturation indication by LED control lamp
- To clean / evacuate the metal grease filter and the water collection tank, the appliance automatically blocks after 40 hours of operation
- Automatic overrun for circulation mode
- Water collection tank: 0.75 litre capacity
- Powerful and quiet blower

• Metal grease filter, dishwasher-safe









EU Regulation no. 65/2014/fan



Automatic opening of the extractor fan





MULTI CONTROL A unique match

Here everything comes together that belongs together: Blaupunkt hobs with Multi Control form a unique combination – together with the Multi Control extractor fan hoods. These can be easily controlled using the hob operating panel, and automatically adjust their output in line with the heat generated by the hob.



EXTRACTOR FAN HOODS

Seared crispy or gently steamed: each meal preparation leaves traces behind in the room. Blaupunkt extractor fan hoods provide fresh air after each cooking experience.



Island hood

EG 1809



- Voltage: 220 240 V
- Total connected load: 208.2 W
- Energy efficiency class: A*
- Average power consumption: 51 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: B*
- Noise min./max. Normal level: 48/64 dB*

Fan output max. Normal level/Intensive level*:

- In extraction mode 521 m³/h/650 m³/h
- In circulation mode 380 m³/h/480 m³/h

- Black painted stainless steel
- For ceiling installation above kitchen islands
- Multi Control
- Optional extraction or circulation mode (an activated carbon filter required for circulation mode)
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- High, fine-tunable fan power
- Powerful and quiet blower
- Uniform, bright lighting with 2 × 4.1 W LED modules
- Illuminance: 270 lux
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Remote control

- Appliance dimensions, extraction: 90.0 109.0 × 140.0 × 60.0 cm
- Appliance dimensions, circulation: $96.5 - 120.0 \times 140.0 \times 60.0 \text{ cm}$

Island hood

EG 1843



- Voltage: 220 240 V
- Total connected load: 278 W
- Energy efficiency class: A+*
- Average power consumption: 47 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: B*
- Noise min./max. Normal level: 52/65 dB*

Fan output max. Normal level / Intensive level*:

- In extraction mode max. 580 m³/h/700 m³/h
- In circulation mode max. 450 m³/h/500 m³/h

- Black painted stainless steel and black glass panel
- For ceiling installation above kitchen islands
- Smart Slider
- Optional extraction or circulation mode (an activated carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable via Smart Slider with LED display
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with $4 \times 2 \, W$ LED lamps
- Illuminance: 180 lux
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Dimensions H × W × D

 Appliance dimensions, extraction: 77.0 – 106.0 × 90.0 × 58.0 cm
- Appliance dimensions, circulation: $77.0 - 106.0 \times 90.0 \times 58.0 \,\text{cm}$

Island hood

EG 1872



- Voltage: 220 240 V
- Total connected load: 225.4 W
- Energy efficiency class: A*
- Average power consumption: 44 kWh / year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 48/62 dB*

Fan output max. Normal level/Intensive level*:

- In extraction mode 560 m³/h/626 m³/h
- In circulation mode 394 m³/h/445 m³/h

- Stainless steel
- For ceiling installation above kitchen islands
- Multi Control
- Optional extraction or circulation mode (an activated) carbon filter required for circulation mode)
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with 2 × 2.7 W LED modules
- Illuminance: 152 lux
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: 76.0 103.0 × 90.0 × 60.0 cm
- Appliance dimensions, circulation: $84.0 - 114.0 \times 90.0 \times 60.0 \text{ cm}$

Island hood

EG 1813



- Voltage: 220 240 V
- Total connected load: 225.4W
- Energy efficiency class: A*
- Average power consumption: 43 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: C*

• Noise min./max. Normal level: 48/60 dB*

Fan output max. Normal level/Intensive level*:

• In circulation mode 394 m³/h/445 m³/h

- Stainless steel and black painted stainless steel
- For ceiling installation above kitchen islands
- Multi Control • Touch Control
- Circulation hood (an activated carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with 2 × 2.7 W LED modules
- Colour temperature: 4,000 K

• Metal grease filter, dishwasher-safe

• Appliance dimensions, circulation: 170.5 × 45.0 × 45.0 cm









In a range from: A+++ to D

EU Regulation no. 65/2014/fan

The hood can be raised elegantly to

the ceiling when not in use, creating

space above the hob and serving as a


lamp to light the kitchen

Made of glass and stainless

steel, the hood stands out

for its extremely clear and

elegant design





5SL 92500

EG 1849

Output, consumption

- Voltage: 220 240 V
- Total connected load: 194W
- Noise min./max. normal level: 55/66 dB* Fan output max. normal level / intensive level*:
- In circulation mode 500 m³/h/550 m³/h

Design, comfort

- Black Glass and Dark Steel
- For ceiling installation above kitchen islands
- Circulation mode (activated carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through remote control
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with $1 \times 16 \, \text{W}$ LED modules
- Colour temperature: 4,000 K







- Metal grease filter, dishwasher-safe
- Remote control

Special accessories: see page 106 – 109

Dimensions $H \times W \times D$

- Device dimensions closed: $28.0 \times 108.7 \times 58.7$ cm
- Device dimensions extended: $128.0 \times 108.7 \times 58.7$ cm



In a range from: A+++ to D

* According to EU Regulation no. 65/2014/fan power according to

Oblique hood

EG 1838













- Voltage: 220 240 V
- Total connected load: 276 W
- Energy efficiency class: A+*
- Average power consumption: 46.4 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 52/64dB*
- Fan output max. Normal level/Intensive level*:
- In extraction mode 630 m³/h/790 m³/h
- In circulation mode 385 m³/h/430 m³/h

- Black glass screen with Dark Steel front
- With gas pressure damper
- For wall installation above cooking zones
- Optional extraction or circulation mode (an activated carbon filter required for circulation mode)
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Filter saturation display
- Powerful and quiet blower
- High, fine-tunable fan power
- Edge suction
- Uniform, bright lighting with 2 × 2.7 W LED lamps
- Illuminance: 154 lux
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: $71.2 - 102.2 \times 90.0 \times 34.0 \,\text{cm}$
- Appliance dimensions, circulation: 83.7 – 102.2 × 90.0 × 34.0 cm

EU Regulation no. 65/2014/fan power according to

see page 7.

Oblique hood

5DI 69850 New

EG 1862















• Voltage: 220 – 240 V

- Total connected load: 252 W
- Energy efficiency class: A*
- Average power consumption: 56.8 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: B*
- Noise min./max. normal level: 48/62 dB*
- Fan output max. normal level/Intensive level*:
- in extraction mode max. 590 m³/h/740 m³/h
- in circulation mode max. 390 m³/h/400 m³/h

- Stainless steel / Black painted stainless steel
- With gas pressure damper
- For wall installation above cooking zones
- Multi Control
- Touch Control
- Optional extraction or circulation mode (activated carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with 2×1 W LED modules
- Illuminance: 250 lux
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Exhaust air shaft

- Appliance dimensions, extraction: 73.2 – 91.7 × 90.0 × 38.4 cm
- Appliance dimensions, circulation: 83.7 – 102.2 × 90.0 × 38.4 cm



Oblique hood

5DI 68850 New

EG 1848















- Voltage: 220 240 V
- Total connected load: 252 W
- Energy efficiency class: A*
- Average power consumption: 56.8 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: B*
- Noise min./max. normal level: 48/62 dB*
- Fan output max. normal level/Intensive level*:
- in extraction mode max. 590 m³/h/740 m³/h
- in circulation mode max. 390 m³/h/400 m³/h

- Stainless steel / Black painted stainless steel
- With gas pressure damper
 For wall installation above cooking zones
- Multi Control
- Touch Control
- Optional extraction or circulation mode (activated carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Powerful and guiet blower
- Uniform, bright lighting with 2×1W LED modules
- Illuminance: 250 lux
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Exhaust air shaft

- Appliance dimensions, extraction: 73.2-91.7 × 80.0 × 38.4 cm
- Appliance dimensions, circulation: 83.7 – 102.2 × 80.0 × 38.4 cm

Oblique hood

5DL 66850 New

EG 1839















- Voltage: 220 240 V
- Total connected load: 252 W
- Energy efficiency class: A* • Average power consumption: 56.8 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: B*
- Noise min./max. normal level: 48/62 dB*
- Fan output max. normal level/Intensive level*:
- in extraction mode max. 590 m³/h/740 m³/h • in circulation mode max. 390 m³/h/400 m³/h

- Stainless steel / Black painted stainless steel
- With gas pressure damper
 For wall installation above cooking zones
- Multi Control
- Touch Control Optional extraction or circulation mode (activated carbon
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level)
- controllable through Multi Control • Intensive levels with automatic reset

filter required for circulation mode)

- Powerful and quiet blower
- Uniform, bright lighting with 2×1 W LED modules
- Illuminance: 250 lux • Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Exhaust air shaft

- Appliance dimensions, extraction: $73.2 - 91.7 \times 60.0 \times 38.4 \text{ cm}$
- Appliance dimensions, circulation: 83.7 – 102.2 × 60.0 × 38.4 cm









Wall hood

EG 1835













- Voltage: 220 240 V
- Total connected load: 274 W
- Energy efficiency class: A+*
- Average power consumption: 43 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: B*
- Noise min./max. Normal level: 52/65 dB*

Fan output max. Normal level/Intensive level*:

- In extraction mode max. 580 m³/h/700 m³/h
- In circulation mode max. 450 m³/h/500 m³/h

- Black painted stainless steel and black glass screen
- For wall installation above cooking zones
- Smart Slider
- Touch Control
- Optional extraction or circulation mode (an activated carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable via Smart Slider with LED display
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with 2×2W LED lamps
- Illuminance: 180 lux
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction:
- 79.0 106.0 × 90.0 × 45.0 cm
- Appliance dimensions, circulation: $79.0 - 106.0 \times 90.0 \times 45.0 \text{ cm}$

Wall hood

EG 1857













- Voltage: 220 240 V
- Total connected load: 225.4W
- Energy efficiency class: A*
- Average power consumption: 44 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 48/62 dB* Fan output max. Normal level/Intensive level*:
- In extraction mode 560 m³/h/632 m³/h
- In circulation mode 394 m³/h/445 m³/h

- Stainless steel
- For wall installation above cooking zones
- Multi Control
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with 2 × 2.7 W LED modules
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: 64.0 – 106.0 × 90.0 × 48.0 cm
- Appliance dimensions, circulation: 71.0 – 113.0 × 90.0 × 48.0 cm

Wall hood











- Voltage: 220 240 V
- Total connected load: 225.4W
- Energy efficiency class: A*
- Average power consumption: 44 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 48/62 dB* Fan output max. Normal level/Intensive level*:
- In extraction mode 560 m³/h/632 m³/h
- In circulation mode 394 m³/h/445 m³/h

- Stainless steel
- For wall installation above cooking zones
- Multi Control
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with2 × 2.7 W LED modules
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: $64.0 - 106.0 \times 60.0 \times 48.0 \,\mathrm{cm}$
- Appliance dimensions, circulation: 71.0 – 113.0 × 60.0 × 48.0 cm





Wall hood

EG 1834



- Voltage: 220 240 V
- Total connected load: 123 W
- Energy efficiency class: C*
- Average power consumption: 64.8 kWh/year*
- Fan efficiency class: E*
- Light efficiency class: D*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 54/68 dB*

Fan output max. Normal level:

- In extraction mode 435 m³/h
- In circulation mode 265 m³/h

- Stainless steel
- For wall installation above cooking zones
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- Mechanical 3-level control
- Intensive levels with automatic reset
- Uniform, bright lighting with 2 × 4 W LED lamps
- Illuminance: 100 lux
- Colour temperature: 3,000 K

- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: 66.7 – 94.0 × 90.0 × 45.0 cm
- Appliance dimensions, circulation: $79.0 - 106.0 \times 90.0 \times 45.0 \,\text{cm}$

Wall hood

EG 1833



- Voltage: 220 240 V
- Total connected load: 123 W
- Energy efficiency class: C*
- Average power consumption: 64.8 kWh/year*
- Fan efficiency class: E*
- Light efficiency class: D*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 54/68 dB*

Fan output max. Normal level:

- In extraction mode 435 m³/h
- In circulation mode 265 m³/h

- Stainless steel
- For wall installation above cooking zones
- Optional extraction or circulation mode (carbon filter) required for circulation mode)
- Mechanical 3-level control
- Intensive levels with automatic reset
- Uniform, bright lighting with 2 × 4 W LED lamps
- Illuminance: 100 lux
- Colour temperature: 3,000 K


- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: $66.7 - 94.0 \times 60.0 \times 45.0 \,\mathrm{cm}$
- Appliance dimensions, circulation: $79.0 - 106.0 \times 60.0 \times 45.0 \text{ cm}$

Ceiling fan

5DD 72557 New

EG 1836













- Voltage: 220 240 V
- Total connected load: 173.4W
- Energy efficiency class: A+*
- Average power consumption: 42 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. normal level: 48/64 dB* Fan output max. normal level/Intensive level*:
- In extraction mode 566 m³/h/703 m³/h
- In circulation mode 413 m³/h/519 m³/h

- Black painted stainless steel and black glass For ceiling installation above kitchen islands
- Multi Control
- Optional extraction or circulation mode (activated carbon filter required for circulation mode)
- Electronic control
- 6-level fan power (5 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with 2×4.2 W LED modules
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Remote control

• Appliance dimensions: max. $16.1 \times 120.0 \times 55.0$ cm

Ceiling fan

EG 1847









- Voltage: 220 240 V
- Total connected load: 98 W
- Noise min./max. Normal level: 55/68 dB*

Fan output max. Normal level/Intensive level*:

• In circulation mode 480 m³/h/550 m³/h

- Black painted stainless steel and black glass
- For ceiling installation above kitchen islands
- Multi Control
- Circulation mode (carbon filter is required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Powerful and quiet blower
- Uniform, bright lighting with 2×4W LED modules
- Optional extendible Multi Control function: LED light with adjustable brightness and colour temperature
- Colour temperature: 4,000 K

- Metal grease filter, dishwasher-safe
- Remote control

• Appliance dimensions: $16.1 \times 90.0 \times 55.0$ cm











Extractor fan hoods

EG 1825





- Voltage: 220 240 V
- Total connected load: 76W
- Energy efficiency class: A*
- Average power consumption: 48.3 kWh/year*
- Fan efficiency class: B*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 50/63 dB* Fan output max. Normal level/Intensive level*:
- In extraction mode 266/412 m³/h
- In circulation mode 166/353 m³/h

- Optional extraction or circulation mode (starter set required for circulation mode)
- For wall-mounted cabinet 90 cm
- Energy-saving operation thanks to efficient **BLDC** technology
- High, fine-tunable fan power through electronic
- 4-level fan power (3 power levels + 1 intensive level), controllable via short-stroke keys
- Intensive levels with automatic reset
- Powerful and guiet blower/Eco Engine
- Uniform, bright lighting with 3 × 1.5 W LED lamps
- Illuminance: 355 lux
- Colour temperature: 3,500 K

• Metal grease filter, dishwasher-safe

- Appliance dimensions, extraction: 20.3 × 89.8 × 29.0 cm
- Appliance dimensions, circulation: 20.3 × 89.8 × 29.0 cm

EU Regulation no. 65/2014/fan power according to



Flat hood

EG 1824





- Voltage: 220 240 V
- Total connected load: 74W
- Energy efficiency class: A*
- Average power consumption: 48.3 kWh/year*
- Fan efficiency class: B*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 49/62 dB* Fan output max. Normal level/Intensive level*:
- In extraction mode 271/405 m³/h
- In circulation mode 174/360 m³/h

- Optional extraction or circulation mode (starter set required for circulation mode)
- For wall-mounted cabinet 60 cm
- Energy-saving operation thanks to efficient BLDC technology • High, fine-tunable fan power through electronic
- 4-level fan power (3 power levels + 1 intensive level), controllable via short-stroke keys
- Intensive levels with automatic reset
- Powerful and quiet blower/Eco Engine
- Uniform, bright lighting with 2 × 1.5 W LED lamps
- Illuminance: 355 lux
- Colour temperature: 3,500 K

• Metal grease filter, dishwasher-safe

- Appliance dimensions, extraction: 20.3 × 59.8 × 29.0 cm
- Appliance dimensions, circulation: 20.3 × 59.8 × 29.0 cm

Flat hood

EG 1804









- Voltage: 220 240 V
- Total connected load: 118 W
- Energy efficiency class: B*
- Average power consumption: 38.6 kWh/year*
- Fan efficiency class: C*
- Light efficiency class: D*
- Grease filter efficiency class: B*
- Noise min./max. Normal level: 54/67 dB
- In extraction mode max. 340 m³/h
- In circulation mode max. 140 m³/h

- Optional extraction or circulation mode (an activated carbon filter required for circulation mode)
- For wall-mounted cabinet 60 cm
- Telescopic extension without panel
- Panel from original light strip from kitchen furniture manufacturer
- 3-level fan power controllable via slide switch
- Automatic switch-on and switch-off by pressing the moving filter surface
- Uniform, bright lighting with 2 × 4 W LED lamps
- Illuminance: 130 lux
- Colour temperature: 3,000 K

• Metal grease filter, dishwasher-safe

- Appliance dimensions: 17.5 × 59.8 × 26.0 cm
- Installation dimensions: $13.5 \times 49.7 \times 22.7$ cm

Fan module

5DA 46450 New

EG 1912











- Energy efficiency class: B*
- Average power consumption: 67.5 kWh/year*
- Fan efficiency class: B
- Light efficiency class: A*
- Noise min./max. normal level: 54/66 dB*

- In extraction mode 580 m³/h/670 m³/h
- In circulation mode 410 m³/h/420 m³/h


- Optional extraction or circulation mode (activated carbon filter required for circulation
- Soft push buttons (3 power levels + 1 intensive level)
- Intensive levels with automatic reset
- High, fine-tunable fan power through electronic control
- Edge suction
- Uniform, bright lighting with 2×1W LED lamp
- Illuminance: 200 lux
- Colour temperature: 4,000 K

• Metal grease filter, dishwasher-safe

- Appliance dimensions, extraction:
- 33.75 × 52.2 × 28.6 cm

Fan module

EG 1827





- Voltage: 220 240 V
- Total connected load: 155 W
- Energy efficiency class: D*
- Average power consumption: 82 kWh/year*
- Fan efficiency class: E*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. normal level: 57/68 dB* Fan output max. Normal level/Intensive level*:
- In extraction mode 360 m³/h
- In circulation mode 200 m³/h

- Fan module with glass panel
- Optional extraction or circulation mode (activated carbon filter required for circulation mode)
- For wall-mounted cabinet 90 cm
- 3-level fan power adjustable via control knob • Uniform, bright lighting with 2 × 1.1 W LED
- Illuminance: 180 lux • Colour temperature: 3,000 K
- Metal grease filter, dishwasher-safe

- Appliance dimensions, extraction: $34.0 \times 89.8 \times 32.0 \text{ cm}$
- Appliance dimensions, circulation: 34.0 × 89.8 × 32.0 – 36.0 cm

Fan module

EG 1826







- Voltage: 220 240 V
- Total connected load: 155 W
- Energy efficiency class: D*
- Average power consumption: 82 kWh/year* • Fan efficiency class: E*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. normal level: 57/68 dB*
- Fan output max. Normal level/Intensive level*: • In extraction mode 360 m³/h
- In circulation mode 200 m³/h
- Fan module with glass panel
- Optional extraction or circulation mode (activated carbon filter required for circulation
- mode) • For wall-mounted cabinet 60 cm

• Colour temperature: 3,000 K

- 3-level fan power adjustable via control knob • Uniform, bright lighting with 2×1.1 W LED
- Illuminance: 180 lux

hulbs

• Metal grease filter, dishwasher-safe


- Appliance dimensions, extraction: $34.0 \times 59.8 \times 32.0 \,\text{cm}$ • Appliance dimensions, circulation: $34.0 \times 59.8 \times 32.0 - 36.0 \text{ cm}$












- Voltage: 220 240 V
- Total connected load: 252 W
- Grease filter efficiency class: C*
- Fan output max. normal level/Intensive level*:

- Fan module with white glass
- mode)

- Appliance dimensions, circulation: • 33.75 × 52.2 × 28.6 cm



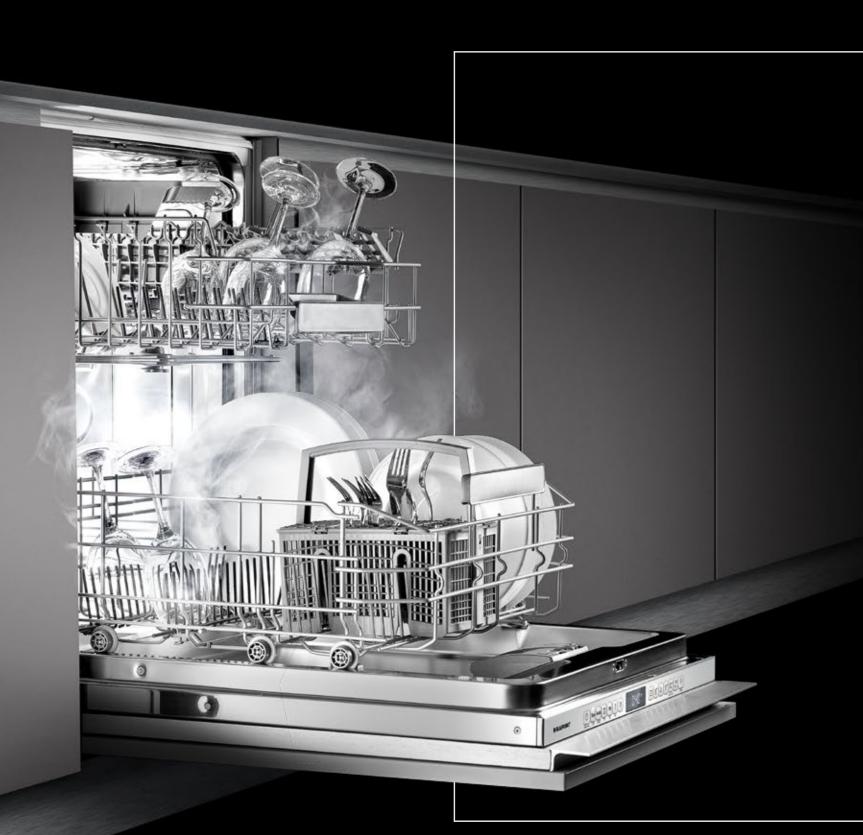

DISHWASHER

First the pleasure, then the work?

Blaupunkt dishwashers take over the work for you, so you can keep having fun when the feast is over. Different installation heights and a wide, variable storage space: the Blaupunkt range has the right helper for every space need.

Built-in dishwasher, fully integrated

5VH 6X01EBE New

EG 1683









- Energy efficiency class: B¹⁾
 Noise efficiency class: B
- Capacity: 13 standard place settings
- Energy²⁾/water³⁾: 64 kWh/91
- Noise: 42 dB (A) re 1 pW
 Connected loads: 220 240 V / 2.4 kW

- 6 programmes: Intensive 70 °C, Auto 45 °C 65 °C, Eco 50°C, Glass 40°C, 1 h 65°C, Pre-Rinse
- Machine cleaning programme
- 5 cleaning temperatures
- Hygiene Plus, Extra Dry, Half Load
- Vario Speed Plus
- Regeneration electronics/immersion heater with integrated pump system (BLDC)
- Dosing assistant
- Aqua sensor/load sensor
- Automatic cleaning / glass protection technology
- Alternating rinse technology
- Heat exchanger
- Eco drying
- Acoustic program finish signal
- InfoLight, blue
- Vario hinge

- Design, comfort
 Fully integrable behind kitchen cabinet door
- Control panel on top of inside door
- Electrical time pre-selection: 1 24 hours / remaining time
- Electrical refill display for salt/rinse agent
- Digital display
- Programme status display (LED)
- Self-cleaning screen with triple shaft filter system
- Cup racks in upper basket (2×)
- Cutlery basket in upper basket
- Vario cutlery basket in lower basket
- Rack stopper to prevent the lower basket from rolling too far
- Height-adjustable upper basket with Rackmatic (3-level)
- Folding spine rows in lower basket (2×)
- Stainless steel interior

- Appliance dimensions:
- 86.5 × 59.8 × 55.0 cm
- Recess dimensions: $86.5 - 92.5 \times 60.0 \times 55.0 \,\mathrm{cm}$ on the 5-year warranty,

efficiency class scale

3) Water consumption in



Built-in dishwasher, fully integrated

5VF 6X01EBE New



- Energy efficiency class: B¹⁾
 Noise efficiency class: B
- Capacity: 13 standard place settings
- Energy²⁾/water³⁾: 64 kWh/91
- Noise: 42 dB (A) re 1 pW
- Connected loads: 220 240 V / 2.4 kW

- 6 programmes: Intensive 70 °C, Auto 45 °C 65 °C, Eco 50°C, Glass 40°C, 1 h 65°C, Pre-Rinse
- Machine cleaning programme
- 5 cleaning temperatures
- Hygiene Plus, Extra Dry, Half Load
- Vario Speed Plus
- Regeneration electronics / immersion heater with integrated pump system (BLDC)
- Dosing assistant
- Aqua sensor/load sensor
- Automatic cleaning / glass protection technology
- Alternating rinse technology
- Heat exchanger
- Eco drying
- Acoustic program finish signal
- Aquastop
- InfoLight, blue
- Vario hinge

- Design, comfort
 Fully integrable behind kitchen cabinet door
- Control panel on top of inside door
- Electrical time pre-selection: 1 24 hours / remaining time
- Electrical refill display for salt/rinse agent
- Digital display
- Programme status display (LED)
- Self-cleaning screen with triple shaft filter system
- Cup racks in upper basket (2×)
- Cutlery basket in upper basket
- Vario cutlery basket in lower basket
- Rack stopper to prevent the lower basket from rolling too far
- Height-adjustable upper basket with Rackmatic (3-level)
- Folding spine rows in lower basket (2×)
- Stainless steel interior

- Appliance dimensions:
- 81.5 × 59.8 × 55.0 cm
- Recess dimensions: $81.5 - 87.5 \times 60.0 \times 55.0 \text{ cm}$





Built-in dishwasher, fully integrated

5VH 6X01HVF New

EG 1682



- Energy efficiency class: D1)
- Noise efficiency class: C
- Capacity: 14 standard place settings
- Energy²⁾/water³⁾: 85 kWh/91
- Noise: 46 dB (A) re 1 pW
- Connected loads: 220 240 V / 2.4 kW

- 6 programmes: Intensive 70 °C, Auto 45 °C 65 °C, Eco 50°C, 1 h 65°C, Glass 40°C, Pre-Rinse
- Machine cleaning programme
- Hygiene Plus, Extra Dry, Half Load
- Vario Speed Plus
- Eco Engine immersion heater with integrated pump system / regeneration electronics
- Dosing assistant
- Aqua sensor/load sensor
- Automatic cleaning/glass protection technology
- Regeneration electronics
- Alternating rinse technology
- Heat exchanger
- Acoustic program finish signal Aguastop
- InfoLight, blue

- Fully integrable behind kitchen cabinet door
- Control panel on top of inside door
- Regeneration electronics/immersion heater with integrated pump system (BLDC)
- Electrical time pre-selection: 1 24 hours / remaining time
- Electrical refill display for salt/rinse agent
- Digital display
- Programme status display (LED)
- Self-cleaning screen with triple shaft filter system
- Cutlery drawer
- Cup racks in upper basket (2×)
- Height-adjustable upper basket
- Folding spine rows in lower basket (2×)

- Appliance dimensions: $86.5 \times 59.8 \times 55.0$ cm
- Recess dimensions: $86.5 92.5 \times 60.0 \times 55.0$ cm



Built-in dishwasher, fully integrated

5VF 6X01HVF New

EG 1668



- Energy efficiency class: D1)
- Noise efficiency class: C
- Capacity: 14 standard place settings
- Energy²⁾/water³⁾: 85 kWh/91
- Noise: 46 dB (A) re 1 pW
- Connected loads: 220 240 V / 2.4 kW

- 6 programmes: Intensive 70°C, Auto 45°C 65°C, Eco 50°C, 1 h 65°C, Glass 40°C, Pre-Rinse
- Machine cleaning programme
- Hygiene Plus, Extra Dry, Half Load
- Vario Speed Plus
- Eco Engine immersion heater with integrated pump system / regeneration electronics
- Dosing assistant
- Aqua sensor/load sensor
- Automatic cleaning/glass protection technology
- Regeneration electronics
- Alternating rinse technology
- Heat exchangerAcoustic program finish signal
- Aquastop
- InfoLight, blue

- Fully integrable behind kitchen cabinet door
- Control panel on top of inside door
- Regeneration electronics/immersion heater with integrated pump system (BLDC)
- Electrical time pre-selection: 1 24 hours / remaining time
- Electrical refill display for salt/rinse agent
- Digital display
- Programme status display (LED)
 Self-cleaning screen with triple shaft filter system
- Cutlery drawer
- Cup racks in upper basket (2×)
- Height-adjustable upper basket
- Folding spine rows in lower basket (2×)

- Appliance dimensions: 81.5 × 59.8 × 55.0 cm
- Recess dimensions: 81.5 87.5 × 60.0 × 55.0 cm

Built-in dishwasher, fully integrated

5VH 5X01HTE New

EG 1677



- Capacity: 13 standard place settings
- Connected loads: 220 240 V / 2.4 kW

- 5 programmes: Intensive 70 °C, Auto 45 °C 65 °C,
- Half load
- Eco Engine immersion heater with integrated pump system/regeneration electronics
- Aqua sensor/load sensor
- Automatic cleaning / glass protection technology
- Alternating rinse technology
- Acoustic program finish signal
- Aquastop
- InfoLight, blue

- Fully integrable behind kitchen cabinet door
- Control panel on top of inside door
- Electrical time pre-selection:
- 3, 6 or 9 hours / remaining time display
- Digital display
- Self-cleaning screen with triple shaft filter system
- Cutlery basket in lower basket
- Cutlery basket in upper basket
- Height-adjustable upper basket
- Folding spine rows in lower basket (2×)

- Appliance dimensions: 86.5 × 59.8 × 55.0 cm

Built-in dishwasher, fully integrated

5VF 5X01HTF New

EG 1665



- Energy efficiency class: D1)
- Noise efficiency class: C
- Capacity: 12 standard place settings
 Energy²/water³: 92 kWh/10.51
- Noise: 48 dB (A) re 1 pW
- Connected loads: 220 240 V / 2.4 kW

- 5 programmes: Intensive 70 °C, Auto 45 °C 65 °C, Eco 50°C, 1 h 65°C, Pre-Rinse
- Half load
- Eco Engine immersion heater with integrated pump system/regeneration electronics
- Dosing assistant • Aqua sensor/load sensor
- Automatic cleaning / glass protection technologyAlternating rinse technology
- Acoustic program finish signal
- Aquastop
- InfoLight, blue

- Fully integrable behind kitchen cabinet door
- Control panel on top of inside door
- Electrical time pre-selection: 3, 6 or 9 hours/remaining time display • Electrical refill display for salt/rinse agent
- Digital display
- Programme status display (LED)
- Self-cleaning screen with triple shaft filter system Cutlery basket in lower basket
- Cup racks in upper basket (2×)
- Cutlery basket in upper basket • Height-adjustable upper basket
- Folding spine rows in lower basket (2×)

- Appliance dimensions: 81.5 × 59.8 × 55.0 cm
- Recess dimensions: $81.5 87.5 \times 60.0 \times 55.0$ cm







3) Water consumption in

efficiency class scale














- Eco 50°C, 1 h 65°C, Pre-Rinse
- Dosing assistant

- Electrical refill display for salt/rinse agent
- Programme status display (LED)
- Cup racks in upper basket (2×)

- Recess dimensions: $86.5 92.5 \times 60.0 \times 55.0$ cm

Built-in dishwasher, fully integrated

EG 1664











- Energy efficiency class: E1)
- Noise efficiency class: C
- Capacity: 14 standard place settings
 Energy²⁾/water³⁾: 95 kWh/12 I
- Noise: 46 dB (A) re 1 pW
- Connection loads: 220 240 V / 1.9 kW

- 6 programmes: Intensive 65 °C, Mix 55 °C, Eco 50 °C, Quick 45 °C, Disinfect 65 °C, Soak
- Half load
- Active dry
- Immersion heater
- Automatic cleaning/glass protection technology
- Heat exchanger
- Acoustic program finish signal
- Aquastop
- Auto open door

- Fully integrable behind kitchen cabinet door
- Control panel on top of inside door • Electrical time pre-selection: 1 – 12 hours
- Electrical refill display for salt/rinse agent
- Digital display
- Programme status display (LED)
- Cup rack in upper basket
- Cutlery basket in lower basket
- Height-adjustable upper basket
- Stainless steel interior

efficiency class scale

²⁾Energy consumption

- Appliance dimensions: 82.0 90.0 × 59.8 × 55.5 cm
 Recess dimensions: 82.0 90.0 × 60.0 × 56.0 cm

Built-in dishwasher, fully integrated

EG 1694











- Energy efficiency class: E1)
- Noise efficiency class: C
- Capacity: 10 standard place settings
 Energy² / water³: 76 kWh / 9 l
- Noise: 47 dB (A) re 1 pW
- Connection loads: 220 240 V / 1.9 kW

- 6 programmes: Intensive 65 °C, Auto 50 °C 60 °C, Eco 50 °C, Quick 45°C, Glasses 45°C, Soak
- Half load
- Immersion heater
- Automatic cleaning / glass protection technology
- Heat exchanger
- Acoustic program finish signal
- Aquastop

- Fully integrable behind kitchen cabinet door
- Control panel on top of inside door
- Electrical time pre-selection: 1 12 hours
 Electrical refill display for salt/rinse agent
- Digital display
- Programme status display (LED)
- Cup rack in upper basket
- Cutlery basket in lower basketHeight-adjustable upper basket
- Stainless steel interior

- Appliance dimensions: 82.0 90.0 × 44.8 × 55.5 cm
- Recess dimensions: $82.0 90.0 \times 45.0 \times 56.0 \text{ cm}$

Built-in dishwasher, partially integrated

5VI 6S01HVE New

















- Energy efficiency class: D1)
- Noise efficiency class: C
- Capacity: 14 standard place settings
 Energy²/water³: 85 kWh/91
- Noise: 46 dB (A) re 1 pW
- Connected loads: 220 240 V / 2.4 kW

- 6 programmes: Intensive 70°C, Auto 45°C 65°C, Eco 50°C, 1 h 65 °C, Glass 40 °C, Pre-Rinse
- Machine cleaning programme
- Hygiene Plus, Extra Dry, Half Load
- Vario Speed Plus
- Eco Engine immersion heater with integrated pump system/regeneration electronics
- Dosing assistant
- Aqua sensor/load sensor
- Automatic cleaning / glass protection technology
- Regeneration electronics
- Alternating rinse technology
- Heat exchanger
- Aguastop with guarantee

- Integrable behind kitchen cabinet door
- Electrical time pre-selection: 1 24 hours / remaining time
- Electrical refill display for salt/rinse agent
- Digital display
- Programme status display (LED)
- Self-cleaning screen with triple shaft filter system
- Cutlery drawer
- Cup racks in upper basket (2×)
- Height-adjustable upper basket
- Folding spine rows in lower basket (2×)

- Appliance dimensions: 81.5 × 59.8 × 57.3 cm
- Recess dimensions: 81.5 87.5 × 60.0 × 55.0 cm













Water



Wash and dry in one appliance



Built-in Washer dryer

5WT 6X00GB

EG 1699

- Output, consumption
 Energy Efficiency Class Wash/Dry: E¹⁾
- Energy Efficiency Class Wash: D1)
- Energy consumption2)/Water consumption3) Wash/Dry: 324 kWh/661
- Energy consumption4/Water consumption5) Wash: 69 kWh / 44 l
- Up to 7 kg capacity (washing) and 5 kg capacity (drying)
- Airborne acoustical noise emissions: 73 dB
- Airborne acoustical noise emission class: B
- Spin speed: 1,351 U/min
- Spin-drying efficiency class: B
- Connection loads: 220 240 V / 1.85 kW

Features, comfort

- Optimized automatic quantity control detects the amount of laundry and adjusts the washing parameters accordingly
- Extremely durable and wear-resistant Inverter-Motor
- Fiber protection through drum movements precisely matched to the selected program
- Water protection system
- Easily accessible Foreign object filter
- Energy optimized Basic Programs: Eco 40°C 60°C, 20°C, Cotton, Wool, Spin & Drain, Mixed
- Time optimized Programs: Wash & Dry 90', Wash & Dry 45', Rapid 30'



- Special Color Programs: White
- Wash & Dry 45': in only 45 minutes your laundry is washed and dried
- Wash & Dry 90': ready in only 90 minutes
- Rapid 30' this cycle lasts only 30 minutes, saving time and energy
 • Steam-Option – Inhibits bad odors and creases through
- automatic drum movements and the addition of steam for up to 6 hours after the end of the cycle
- Colours 15 °C protect colours by washing in cold water
- 53 % of moisture contained in load

Technical data and dimensions $\mathbf{H} \times \mathbf{W} \times \mathbf{D}$

- Door hinge left
- Appliance dimensions: $82.0 90.0 \times 59.5 \times 54.5$ cm
- Installation dimensions: $82.0 90.0 \times 60.0 \times 57.0 \text{ cm}$



¹⁾ Scale of Energy Efficiency Classes from A to G

²⁾ Energy consumption in kWh per 100 complete cycles (in Eco 40 – 60 °C programme)

³⁾Water consumption in litres per complete cycle (in Eco 40 – 60 °C programme)

⁴⁾ Energy consumption in kWh per 100 washing cycles (in Eco 40 – 60 °C programme)

⁵⁾Weighted water consumption in litres per washing cycle (in Eco 40 – 60 °C programme)

The various cooling zones in Blaupunkt refrigerations and freezers create the right temperature for all chilled items. Perfectly kept food retains its freshness for a long time, thanks to different temperature zones and electronic control.



Built-in freezer

EG 1729















- Energy efficiency class: E1)
- Energy consumption: 231 kWh/year
- Energy consumption: 0.63 kWh/24h
- Total capacity: 1971Noise: 40 dB (A) re 1 pW
- Climate class: SN-T
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Easy-to-clean, bright interior
- LED interior lighting in freezer compartment
- Electronic temperature control with LED reading

**** - Freezer compartment -18°C and lower

- NoFrost never defrost again!
- 6 frozen produce drawers
- 2 freezer compartments with flap
- Capacity 1971
- Freezing capacity: 11.5 kg in 24 hours
- Storage time in case of malfunction: 6 hours
- Super freezing

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: $177.0 \times 54.0 \times 54.5 \,\mathrm{cm}$
- Recess dimensions: $177.5 \times 56.0 \times 55.0 \text{ cm}$

Built-in refrigeration

EG 1728





- Energy efficiency class: E1)
- Energy consumption: 112 kWh/year
- Energy consumption: 0.306 kWh/24 h
- Total capacity: 2941
 Noise: 39 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Electronic temperature control with LED reading
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment

- Refrigeration: Capacity 2941
- Super cooling5 shelves made of safety glass,
- 4 of which are height-adjustable
- 5 full-width door shelves, 1 height-adjustable
- Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- Bottle rack
- Egg tray

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: $177.0 \times 54.0 \times 54.5$ cm
- Recess dimensions: $177.5 \times 56.0 \times 55.0 \text{ cm}$



5CR 296FD0 New

EG 1771





193,5 Electronic control

- Energy efficiency class: D1)
- Power consumption: 184 kWh/year
- Power consumption: 0.504 kWh / 24 h
- Total useful capacity: 2891
- Noise: 35 dB (A) re 1 pW
- Climate class: SN-ST
- Connected loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigerator compartment
 Electronic temperature control with precise digital reading

- Refrigerator: Total useful capacity 1841
 4 shelves made of safety glass, 3 of which height-adjustable
- Transparent Vario tray for fruit and vegetables covered by a safety glass panel
- 4 full-width door shelves
- Egg tray

**** - Freezer compartment -18 °C and lower

- 3 frozen produce drawers • Total useful capacity 751

- Freezing capacity: 7.5 kg in 24 hours
- Storage time in case of malfunction: 10 hours
- Super freezing
- Frozen produce calendar

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: 193.5 × 55.8 × 54.8 cm
 Recess dimensions: 194.0 × 56.0 × 55.0 cm



Built-in refrigeration / freezer combination

EG 1773



- Energy efficiency class: E1)
- Energy consumption: 234 kWh/year
- Energy consumption: 0.641 kWh/24h
- Total capacity: 260 INoise: 35 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V/90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment
 Electronic temperature control with precise digital reading
- Super freezing with automatic deactivation

- Refrigeration compartment
 Refrigeration: Capacity 1841
- 4 shelves made of safety glass, 3 of which are height-adjustable
- Transparent Vario tray for fruit and vegetables,
- covered by a safety glass panel

 3 full-width door shelves
- Egg tray

• NoFrost– never defrost again!

- 3 frozen produce drawers
- Capacity 761
- Freezing capacity: 4 kg in 24 hours • Storage time in case of malfunction: 10 hours
- Super freezingFrozen produce calendar

- Door hinged on right, changeable • Appliance dimensions: $177.2 \times 54.1 \times 54.8 \text{ cm}$
- Recess dimensions: $177.5 \times 56.0 \times 55.0 \text{ cm}$











Built-in refrigeration / freezer combination

EG 1777





8









- Energy efficiency class: E1)
- Energy consumption: 216 kWh/year³⁾
- Energy consumption: 0.591 kWh/24 h³⁾
- Total capacity: 270 lNoise: 35 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment
 Electronic temperature control with precise digital reading

- Refrigeration: Capacity 2001
- 5 shelves made of safety glass,
- 4 of which are height-adjustable
- Transparent Vario tray for fruit and vegetables,
- covered by a safety glass panel • 4 full-width door shelves
- Egg tray

**** - Freezer compartment -18°C and lower

- 2 frozen produce drawers
- Capacity 701
- Low Frost • Vario Zone
- Fresh Sense
- Big Box
- Freezing capacity: 3.2 kg in 24 hours
- Storage time in case of malfunction: 12 hours
- Super freezing
- Frozen produce calendar

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: $177.2 \times 54.1 \times 54.8 \, \text{cm}$
- Recess dimensions:



Built-in refrigeration / freezer combination

EG 1774







- Energy efficiency class: E1)
- Energy consumption: 218 kWh/year³⁾
- Energy consumption: 0.597 kWh/24 h³⁾
- Total capacity: 243 INoise: 41 dB (A) re 1 pW
- Climate class: N-T
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment
 Electronic temperature control with precise digital reading

- Refrigeration: Capacity 1801
- 4 shelves made of safety glass,
- 3 of which are height-adjustable
- Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 4 full-width door shelves
- Bottle rack
- Egg tray

**** – Freezer compartment -18 °C and lower

- 3 frozen produce drawers
- Capacity 631
- No Frost
- Freezing capacity: 3.3 kg in 24 hours
- Storage time in case of malfunction: 8 hours
- Frozen produce calendar

- Drag hinge Door hinged on right, changeable
- Appliance dimensions: 177.0 × 54.0 × 54.5 cm
- Recess dimensions: $177.6 \times 56.0 \times 55.0 \text{ cm}$



Built-in refrigeration / freezer combination

EG 1778





1**7**7,⁵

- Energy efficiency class: E¹⁾
- Energy consumption: 217 kWh/year³⁾
- Energy consumption: 0.594 kWh/24 h³⁾
- Total capacity: 251 l
 Noise: 38 dB (A) re 1 pW
- Climate class: N-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment
 Electronic temperature control with precise digital reading

- Refrigeration: Capacity 1811
- 4 shelves made of safety glass, 3 of which are height-adjustable
- Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 4 full-width door shelves
- Bottle rack
- Egg tray

**** - Freezer compartment -18 °C and lower

- 3 frozen produce drawers
- Capacity 701
- Low Frost
- Freezing capacity: 3.3 kg in 24 hours
- Storage time in case of malfunction: 12.5 hours
- Frozen produce calendar

- Drag hinge Door hinged on right, changeable
- Appliance dimensions: 177.0 × 54.0 × 54.5 cm
- Recess dimensions: $177.6 \times 56.0 \times 55.0 \text{ cm}$



Built-in refrigeration / freezer combination

EG 1787

Electronic control







- Energy efficiency class: E1)
- Energy consumption: 217 kWh/year³⁾
- Energy consumption: 0.594 kWh/24 h³⁾
- Total capacity: 249 I
 Noise: 39 dB (A) re 1 pW
- Climate class: N-ST
- Connection loads: 220 240 V / 115 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior • LED interior lighting in refrigeration compartment

- Refrigeration: Capacity 1791
- 5 shelves made of safety glass, 4 of which are height-adjustable • Transparent Vario tray for fruit and vegetables,
- covered by a safety glass panel
- 3 full-width door shelves • Egg tray

**** - Freezer compartment -18°C and lower


- 3 frozen produce drawers
- Capacity 701
- Freezing capacity: 3.2 kg in 24 hours
 Storage time in case of malfunction: 10 hours
- Super freezing
- Frozen produce calendar

• Drag hinge • Door hinged on right, changeable

- Appliance dimensions: $176.5 \times 54.0 \times 54.0 \text{ cm}$
- Recess dimensions: 177.2 177.6 × 56.0 × 55.0 cm









Built-in refrigerator/freezer combination

5CC 377FE1 New

EG 1764













- Energy efficiency class: E1)
- Power consumption: 207 kWh/year
- Power consumption: 0.567 kWh/24 h
- Total useful capacity: 2311
- Noise: 36 dB (A) re 1 pW
- Climate class: SN-T
- Connected loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigerator compartment
- Electronic temperature control with precise digital reading

- Refrigerator: Total useful capacity 1691
- 4 shelves made of safety glass, 3 of which height-adjustable
 Transparent vegetable box, with rippled base
- 4 full-width door shelves
- Egg tray

**** - Freezer compartment -18°C and lower

- 2 frozen produce drawers
- Total useful capacity 621
- Low Frost
- Vario Zone
- Big Box
- Fresh Sense
- Freezing capacity: 5.0 kg in 24 hours
- Storage time in case of malfunction: 12 hours
- Super freezing with automatic freeze
- Frozen produce calendar

- Flat hingeDoor hinged on right, changeable
- Appliance dimensions: 157.8 × 55.8 × 54.5 cm
- Recess dimensions: $158.0 \times 56.0 \times 55.0$ cm
- efficiency class scale
- on the 5-year warranty,



Built-in refrigerator/freezer combination

5CC 268FE0 New

EG 1759











- Energy efficiency class: E1)
- Power consumption: 204 kWh/year
- Power consumption: 0.558 kWh / 24 h
- Total useful capacity: 2111
- Noise: 38 dB (A) re 1 pW
- Climate class: N-T
- Connected loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigerator compartment

- Refrigerator: Total useful capacity 1541
- 3 shelves made of safety glass, 2 of which height-adjustable
 Transparent tray for fruit and vegetables, covered by a
- safety glass panel
- 3 full-width door shelves
- Egg tray

**** - Freezer compartment -18 °C and lower

- 2 frozen produce drawers
- Total useful capacity 571
- Low Frost
- Freezing capacity: 3 kg in 24 hours
 Storage time in case of malfunction: 11 hours
- Super freezing

- Door hinged on right, changeable
- Appliance dimensions: $144.0 \times 54.0 \times 54.5$ cm
- Recess dimensions: 144.5 146.5 × 56.0 × 55.0 cm











- Energy efficiency class: E1)
- Energy consumption: 124 kWh/year³⁾
- Energy consumption: 0.339 kWh/24 h³⁾
- Total capacity: 2221
- Noise: 37 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Convenient, simple fitting
- Fully automatic defrost inside the fridge
- LED interior lighting in refrigeration compartment
 Electronic temperature control with precise digital reading

- Refrigeration: Capacity 1631
- Super cooling
- Extra Fresh zone close to 0 °C with 59 I useful capacity, of which 1 container 0°C humidity controllable, on telescopic extension
- Extra Fresh drawer "dry zone" on telescopic extension
 4 height-adjustable shelves made of safety glass
- 4 full-width door shelves
- Egg tray

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: $139.7 \times 55.8 \times 54.5$ cm
- Recess dimensions: $140.0 \times 56.0 \times 55.0$ cm









Built-in refrigeration

EG 1768









- Energy efficiency class: E1)
- Energy consumption: 147 kWh/year
 Energy consumption: 0.518 kWh/24 h
- Total capacity: 1871
- Noise: 35 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment
- Electronic temperature control with precise digital reading

- Refrigeration: Capacity 1721
- 4 shelves made of safety glass,
- 3 of which are height-adjustable
- Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 4 full-width door shelves
- Egg tray

- Freezer compartment -18 °C and lower - 1 freezer compartment with flap

- Capacity 15 |
- Freezing capacity: 3 kg in 24 hours
- Storage time in case of malfunction: 10 hours
- Frozen produce calendar

- Flat hinge
- Door hinged on right, changeable
 Appliance dimensions: 122.1 × 54.1 × 54.8 cm
- Recess dimensions: $122.5 \times 56.0 \times 55.0$ cm

Built-in refrigeration

EG 1767





- Energy efficiency class: E1)
- Energy consumption: 101 kWh/year
 Energy consumption: 0.276 kWh/24 h
- Total capacity: 2041
- Noise: 35 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
 Easy-to-clean, bright interior
- LED interior lighting
- Electronic temperature control with precise digital reading

- Refrigeration: Capacity 2041
- 5 shelves made of safety glass,
- 4 of which are height-adjustable
- Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 4 full-width door shelves
- Egg tray

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: $122.1 \times 54.1 \times 54.8$ cm
- Recess dimensions: $122.5 \times 56.0 \times 55.0$ cm

Built-in refrigeration

EG 1758





A F G

122,5

- Energy efficiency class: E1)
- Energy consumption: 146 kWh/year
 Energy consumption: 0.498 kWh/24 h
- Total capacity: 1811
- Noise: 39 dB (A) re 1 pW
- Climate class: N-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
 Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment

- Refrigeration: Useful capacity 1671
- 4 shelves made of safety glass, 3 of which are height-adjustable
- Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 3 full-width door shelves
- Egg tray

- Freezer compartment -18°C and lower

- 1 freezer compartment with flapFreezer compartment for pizzas
- Capacity 141
- Storage time in case of malfunction: 6.5 hours
- Frozen produce calendar

- Drag hinge
- Door hinged on right, changeable
- Appliance dimensions: 122.0 × 54.0 × 54.0 cm
 Recess dimensions: 122.0 123.0 × 56.0 × 55.0 cm

Built-in refrigeration







- Energy efficiency class: E1)
- Energy consumption: 100 kWh/year
 Energy consumption: 0.274 kWh/24 h
- Total capacity: 1991
- Noise: 39 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 80 W


- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment

- Refrigeration: Capacity 1991
- 6 shelves made of safety glass,
- 5 of which are height-adjustable • Transparent Vario tray for fruit and vegetables,
- covered by a safety glass panel
- 3 full-width door shelves
- Egg tray

- Drag hinge Door hinged on right, changeable
- Appliance dimensions: $122.0 \times 54.0 \times 54.0 \text{ cm}$ • Recess dimensions: $122.0 - 123.0 \times 56.0 \times 55.0 \text{ cm}$















Built-in refrigeration

EG 1735











- Energy efficiency class: E1)
- Energy consumption: 145 kWh/year
- Energy consumption: 0.397 kWh / 24 h
- Total capacity: 1471
- Noise: 39 dB (A) re 1 pW
- Climate class: ST
- Connection loads: 220 240 V / 90

- Features, comfort
 Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting
- Electronic temperature control with precise digital reading

- Refrigeration: Capacity 1321
- 3 shelves made of safety glass,
- 2 of which are height-adjustable
 Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 3 full-width door shelves
- Egg tray

**** - Freezer compartment -18°C and lower

- 1 freezer compartment with flap
- Capacity 151
- Freezing capacity: 3 kg in 24 hours
- Storage time in case of malfunction: 10 hours
- Frozen produce calendar

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: 102.1 × 54.1 × 54.8 cm
- Recess dimensions: $102.5 \times 56.0 \times 55.0$ cm

Built-in refrigeration

EG 1734







- Energy efficiency class: E1)
- Energy consumption: 96 kWh/year
- Energy consumption: 0.236 kWh/24h
- Total capacity: 1651
- Noise: 39 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting
 Electronic temperature control with precise digital reading

- Refrigeration: Capacity 1651
- 4 shelves made of safety glass,
- 3 of which are height-adjustable

 Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 3 full-width door shelves
- Egg tray

- Flat hinge
- Door hinged on right, changeable
 Appliance dimensions: 102.1 × 54.1 × 54.8 cm
 Recess dimensions: 102.5 × 56.0 × 55.0 cm

Built-in refrigeration

EG 1723













- Energy efficiency class: E1)
- Energy consumption: 144 kWh/year
- Energy consumption: 0.394 kWh/24 h
- Total capacity: 1501
- Noise: 39 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 90 W

- Features, comfort
 Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting
 Electronic temperature control with precise digital reading

- Refrigeration: Capacity 1041
- 2 shelves made of safety glass,
- 1 of which areheight-adjustableTransparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 2 full-width door shelves
- Egg tray

**** - Freezer compartment -18°C and lower

- 1 freezer compartment with flap
- Freezing capacity: 3 kg in 24 hours
- Storage time in case of malfunction: 10 hours
- Frozen produce calendar

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: 87.4 × 54.1 × 54.8 cm
- Recess dimensions: $88.0 \times 56.0 \times 55.0$ cm

Built-in refrigeration













- Energy efficiency class: E¹⁾
- Energy consumption: 92 kWh/year
- Energy consumption: 0.252 kWh/24h
- Total capacity: 1291
- Noise: 35 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting
- Electronic temperature control with precise digital reading

- Refrigeration: Capacity 1361
- 3 shelves made of safety glass, 2 of which are height-adjustable
- Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 2 full-width door shelves
- Egg tray

- Flat hinge
- Door hinged on right, changeable
- Appliance dimensions: 87.4 × 54.1 × 54.8 cm
 Recess dimensions: 88.0 × 56.0 × 55.0 cm


















Built-in refrigeration

EG 1721









- Energy efficiency class: E1)
- Energy consumption: 142 kWh/year
- Energy consumption: 0.389/24h
- Total capacity: 1181
- Noise: 39 dB (A) re 1 pW
- Climate class: N-ST
- Connection loads: 220 240 V / 80 W

- Features, comfort
 Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment

- Refrigeration: Capacity 1041
- 3 shelves made of safety glass,
- 2 of which are height-adjustable

 Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 3 full-width door shelves

*** - Freezer compartment -18°C and lower

- 1 freezer compartment with flap
- 1 freezer compartment for pizzas
- Storage time in case of malfunction: 6.5 hours

- Drag hinge Door hinged on right, changeable
- Appliance dimensions: $87.5 \times 54.0 \times 54.0 \text{ cm}$
- Recess dimensions: $87.6 88.6 \times 56.0 \times 55.0$ cm

Built-in refrigeration

EG 1720







- Energy efficiency class: E1)
- Energy consumption: 92 kWh/year
- Energy consumption: 0.252/24h
- Total capacity: 1291
- Noise: 39 dB (A) re 1 pW
- Climate class: N-ST
- Connection loads: 220 240 V / 80 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment

- Refrigeration: Capacity 1291
- 4 shelves made of safety glass,
- 3 of which are height-adjustable

 Transparent Vario tray for fruit and vegetables, covered by a safety glass panel
- 3 full-width door shelves
- Egg tray

- Drag hinge
- Door hinged on right, changeable
- Appliance dimensions: $87.5 \times 54.0 \times 54.0 \, \text{cm}$
- Recess dimensions: 87.6 88.6 × 56.0 × 55.0 cm

Built-in freezer

EG 1724







• Energy efficiency class: D1)

- Energy efficiency class: E1)
- Energy consumption: 177 kWh/year³⁾
- Energy consumption: 0.484 kWh/24 h³⁾
- Total capacity: 951
- Noise: 38 dB (A) re 1 pW
- Climate class: SN-T
- Connection loads: 220 240 V / 90 W

- Features, comfort

 4 frozen produce drawers
- Freezing capacity: 6kg in 24 hours
- Storage time in case of malfunction: 8 hours
- Can be combined into a refrigeration / freezer combination with an integrated refrigeration

- Drag hinge Door hinged on right, changeable
- Appliance dimensions: 87.5 × 54.0 × 54.5 cm
- Recess dimensions: $87.8 \times 56.0 \times 55.0$ cm

Undercounter refrigeration

5CP 221FD0 New

EG 1719



• Power consumption: 119 kWh/year

• Connected loads: 220 – 240 V / 90 W

Suitable for undercounter installation

• Electronic temperature control

Fully automatic defrost inside the fridge

Easy-to-clean, bright interior
EmotionLight – gently dimming LED interior

• Ventilation in the base area, no section in the

• Refrigerator: Total useful capacity 93 l

• 2 shelves made of safety glass, 1 of which

• Bottom compartment with sliding lid – separate

• 2 door shelves, 1 of which bottle holder with

• Total useful capacity: 1101

• Noise: 35 dB (A) re 1 pW

Climate class: SN-T

Super cooling

lighting

worktop

storage area

• Power consumption: 0.326 kWh/24 h





Undercounter refrigeration

5CN 221FF0 New

EG 1718









- Energy efficiency class: E1)
- Power consumption: 93 kWh/year
- Power consumption: 0.254 kWh/24h
- Noise: 35 dB (A) re 1 pW
- Climate class: SN-T

- Super cooling
- Easy-to-clean, bright interior
- storage area
- Electronic temperature control
- worktop
- 3 shelves made of safety glass, 2 of which
- Egg tray

- **** Freezer compartment -18 °C and
- 1 freezer compartment with flap • Freezer compartment for pizzas
- Total useful capacity 17 l

extra deep door shelf

• Freezing capacity: 3 kg in 24 hours • Storage time in case of malfunction: 9 hours

- Flat hinge
- Height-adjustable front feet
- Door hinged on right, changeable Appliance dimensions:
- 82.0 cm × 59.8 cm × 54.8 cm
- Recess dimensions: $82.0 - 90.0 \,\text{cm} \times 60.0 \,\text{cm} \times 55.0 \,\text{cm}$

- Total useful capacity: 1341
- Connected loads: 220 240 V / 90 W
- Suitable for undercounter installation
- Fully automatic defrost inside the fridge
- EmotionLight gently dimming LED interior
- Bottom compartment with sliding lid separate
- Ventilation in the base area, no section in the
- height-adjustable
 2 door shelves, 1 of which bottle holder with
- extra deep door shelf

- Height-adjustable front feet
- Door hinged on right, changeable • Appliance dimensions:
- 82.0 cm × 59.8 cm × 54.8 cm • Recess dimensions: $82.0 - 90.0 \,\mathrm{cm} \times 60.0 \,\mathrm{cm} \times 55.0 \,\mathrm{cm}$






















FREE-STANDING REFRIGERATORS

The cool maverick

Cross door refrigerator/freezer combination

5CD 891SC0 New

Output, consumption

- Energy efficiency class: D1)
- Power consumption: 255 kWh/year
- Power consumption: 0.698 kWh/24 h
- Total useful capacity: 5221
- Noise: 39 dB (A) re 1 pW Climate class: SN-ST
- Connected loads: 220 240 V / 180 W

Features, comfort

- Free-standing cross door refrigerator / freezer combination
- Separate temperature regulation for refrigerator and freezer compartments
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigerator compartment
 Electronic temperature control with LED reading
- Multi-temperature zone
- XXL capacity space for entire baking trays and other bulky items

Refrigerator compartment

- Refrigerator: Total useful capacity 343 l (multi-temperature zone)
- 3 shelves made of safety glass, 2 of which height-adjustable
- Transparent storage drawers with 0° degree zone
- 6 full-width door shelves
- Egg tray













**** - Freezer compartment -18°C and lower

- 6 frozen produce drawers
- Total useful capacity 1791 (multi-temperature zone)
- Freezing capacity: 13 kg in 24 hours
- Storage time in case of malfunction: 11 hours
- Super freezing with automatic freeze

Technical data and dimensions H × W × D

• Appliance dimensions: 190.5 × 91.0 × 69.0 cm







^{*} For more information on the 5-year warranty, see page 7.

Free-standing refrigeration / freezer combination

EG 1704











- Energy efficiency class: D1)
- Energy consumption: 203 kWh/year
 Energy consumption: 0.556 kWh/24 h
- Total capacity: 3471
- Noise: 39 dB (A) re 1 pW
- Climate class: SN-T
- Connection loads: 220 240 V / 150 W

- Free-standing
- Stainless steel look
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment
- Electronic temperature control with LED reading

- Refrigeration: Capacity 2431
- 4 shelves made of safety glass,
- 3 of which are height-adjustable
- 2 transparent Vario trays for fruit and vegetables, covered by safety glass panel
- 3 full-width and 1 half door shelves
- Bottle rack
- Egg tray

**** - Freezer compartment -18 °C and lower

- 3 frozen produce drawers
- Capacity 1041
- NoFrost
- Freezing capacity: 6 kg in 24 hours
- Storage time in case of malfunction: 11 hours
- Super freezing with automatic freeze

Technical data and dimensions H × W × D• Door hinged on right, changeable

- Appliance dimensions: $195.0 \times 60.0 \times 69.0$ cm

Free-standing refrigeration / freezer combination

EG 1705







- Energy efficiency class: E1)
- Energy consumption: 306 kWh/year
 Energy consumption: 0.838 kWh/24 h
- Total capacity: 5131
- Noise: 39 dB (A) re 1 pW
- Climate class: SN-ST
- Connection loads: 220 240 V / 150 W

- Free-standing side-by-side refrigeration/ freezer combination
- Stainless steel look
- Rod handle
- Separate temperature regulation for refrigeration and freezer chamber
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment
- Electronic temperature control with LED reading
- Water and ice dispenser + ice crusher
- External fixed water supply including 5-metre connecting hose and 3/4" water connection adapter

Refrigeration compartment • Refrigeration: Capacity 3441

- 4 shelves made of safety glass, 2 of which are height-adjustable
- 2 transparent Vario trays for fruit and vegetables
- 5 full-width door shelves
- Egg tray

**** - Freezer compartment -18°C and lower

- 4 shelves made of safety glass, 1 height-adjustable
- 2 frozen produce drawers 1 full-width door shelfCapacity 169 l
- NoFrost
- Freezing capacity: 12 kg in 24 hours
- Storage time in case of malfunction: 6 hours
- Super freezing with automatic freeze
- Automatic ice cube maker

• Appliance dimensions: $177.0 \times 90.0 \times 66.0 \text{ cm}$









BUILT-IN WINE REFRIGERATION

Made for enjoyment

Built-in wine refrigeration

5WK 610FF0

Output, consumption

- Energy efficiency class: G1)
- Energy consumption: 140 kWh/year
- Energy consumption: 0.383 kWh/24h
- Total capacity: 831
- Noise: 40 dB (A) re 1 pW
- Climate class: N
- Connection loads: 220 240 V / 90 W

- Black glass front
- Handle-free opening with push-to-open (electronic)
- Touch Control
- White LED lighting
- 3 solid wood shelves
- 36-bottle capacity
- Upper part: 24 bottles (75 cl) • Lower part: 12 bottles (75 cl)
- 2 temperature zones for sparking, white, rosé and red wines 5°-12°C/12°-20°C
- Alarm when door is open
- Optical and acoustic temperature alarm
- Electronic temperature control with precise digital reading
- UV protection
- Demo mode
- Anti-vibration system
- Automatic defrosting
- Winter system











Technical data and dimensions $\mathbf{H}\times\mathbf{W}\times\mathbf{D}$

- Flat hinge
- Door hinged on right 5WK 610FF0R, EG 1793
- Door hinged on left 5WK 610FF0L, EG 1794
- Appliance dimensions: 58.9 × 59.0 × 56.0 cm
- Recess dimensions: $59.1 \times 55.0 \times 55.0 \text{ cm}$



electronically controlled opening, this appliance integrates discreetly into any kitchen counter,"



winner 2023



0 4 1 14 × 8 7 2 7 0



The perfect climate for fine wines

Undercounter wine refrigeration

5WK 820FF0

Output, consumption

- Energy efficiency class: G1)
- Energy consumption: 156 kWh/year
- Energy consumption: 0.427 kWh/24h
- Total capacity: 1321
- Noise: 39 dB (A) re 1 pW
- Climate class: N
- Connection loads: 220 240 V / 80 W

- Black glass front
- Handle-free opening with push-to-open (electronic)
- Touch Control
- White LED lighting
- 5 solid wood shelves
- 53-bottle capacity
- Upper part: 16 bottles (75 cl) • Lower part: 37 bottles (75 cl)
- 2 temperature zones for sparking, white, rosé and red wines 5°-12°C/12°-20°C
- Alarm when door is open
- Optical and acoustic temperature alarm
- Electronic temperature control with precise digital reading
- Demo mode
- Anti-vibration system
- Automatic defrosting
- Winter system











Technical data and dimensions $\mathbf{H}\times\mathbf{W}\times\mathbf{D}$

- Flat hinge
- Door hinged on right 5WK 820FF0R, EG 1708
- Door hinged on left 5WK 820FF0L, EG 1709
- Appliance dimensions: $82.0 89.0 \times 59.5 \times 57.4$ cm
- Recess dimensions: $82.5 89.5 \times 60.0 \times 55.5$ cm





Special accessories for ovens



Enamelled baking tray (black)


5Z 11BE11

EG 12202

Compatible with

5B10K 0050 5B10M 0050

5B10M 0060



Multi-use wire shelf

5Z 50CR10X0

EG 12641



OS 8990GB 5B50N 8690




Universal pan (black)

5Z 36BA50

EG 1233





Multi-use wire shelf

5Z 50CR10X1

FG 1280

Compatible with5B60M 8690GB

5C60M 8690GB



Universal pan (black)

5Z 50CB10E1

FG 12802



5B60M 8690G

5C60M 8690GB



Air Fry insert

5Z 50AF10E0

EG 12651

Compatible with

5B50P 8690GB




Universal pan (grey)

5Z 50CB10E0

EG 12642

Compatible with 5B50P 8690GB

5850N 8690GB



Steamer insert (stainless steel)

5Z 50CS10E0

G 15421

Compatible with



Universal pan (grey)

5Z 11BU11

FG 1101

Compatible with

5B10M 0060



Telescopic extension rail

5Z 50CU10E0

G 126/13

Compatible with

5B50P 8690GB 5B50N 8

5B90S 89900



Glass dish

5Z 50CG10E0

Multi-use wire shelf

5Z 11CR13X0

EG 15141

EG 12421

Compatible with

5B60M 8690GB

5C60M 8690GR

Compatible with



Telescopic extension rail

5Z 36VC50

·C 12222

 Compatible with

 5B36N 0250GB
 5B30N 0250GB

 5B36P 0250GB



Temperature probe

5Z 50TE10E0

EG 12811

Compatible with

5B90S 8990GB 5B50N 869 5B50P 8690GB




Temperature probe

5Z 50TE10E1

FG 15422

Compatible with



Multi-use wire shelf

5Z 36CR10X0

FG 12333

Compatible with

336N 0250GB 5B30N 0

5B36P 0250GB

Top panel, black

5Z 50BL10E0

EG 12803

Compatible with

ovens

Accessories for hobs with integrated extraction




Universal connector

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



FK 101

Companible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



Flat duct pipe 100 cm

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



FK 102

Coı	mpatible wi	th	
5IX	99291	5IX 9429	91
5IX	90291	5IX 8029	90
5IX	60290		



Pipe bend 90° – horizontal –

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	

	í
	-

Wall box with stainless steel external vent

Compatible with	1
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



Pipe bend 90° – vertical –


Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	

9291	5IX 94291
0291	5IX 80290
0290	

Base ventilation grille

FK 150

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



Deflector 90°

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



Connector 15° curve - horizontal -

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290



Connection piece

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290



Wall conduit incl. Thermobox

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



companione with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	




Accessories for hobs with integrated extraction



Connector 90° elbow – horizontal –

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	





Connector 90° elbow – vertical –

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
5IX 60290	



Flat duct

Compatible with	
5IX 99291	5IX 94291
5IX 90291	5IX 80290
51V 60200	



Kit for right air outlet

5Z 9104X1


Con	npatible	with	
5IX 9	99291		
5IX 9	94291		
51X 9	90291		



Activated carbon filter

5Z 9105X1

Compatible with	
511/ 00004	



Set of 2 activated carbon filters

5Z 9009LF1

Compatible with


5IX 90291



Activated carbon filter

5Z 9401X1

Compatible with



Activated carbon filter


5Z 9402X1

Compatible with

Grease filter insert with mesh fabric

5Z 9403X1

Compatible with



Grease filter insert with mesh fabric

5Z 9404X1

Compatible with



Filter box for base installation

5Z 9405X1

EG 13623

Compatible with

All hobs with integrated



Replacement filter for filter box

5Z 9406X1

Compatible with

several times.

Accessories for gas hobs



Nozzle set / liquid gas

5Z 9005EX1

Compatible with

5GB 62190




Nozzle set/liquid gas

5Z 9005EX2

Compatible with

Special accessories for extractor fan hoods




Stainless steel metallic grease

filter

5Z 9100X3

with grease drip tray



Stainless steel metallic grease

filter


EG 18885

Compatible with 5DB 66254

Compatible with

5Z 9202X1

EG 18441




Stainless steel metallic grease

пiter

5Z 9203X1

EG 1854




Stainless steel metallic grease

filter

5Z 9225X1

EG 18672



Metal handle

5Z 5750N0

EG 18042

Compatible with

Compatible with

5DA 3625



Metal handle

5Z 5760N0

EG 18012

Compatible with

5DA 36453



Metal handle

5Z 5790N0

FG 18021

Compatible with

5DA 39452



Activated carbon filter

5Z 9102X1

EG 18911

Compatible with
5DB 66254

5DB 69254




Activated carbon filter

5Z 9111X1

FG 18171

Compatible with

5DB 9645




Activated carbon filter

5Z 9101X1

FG 18921

Compatible with

5DF 92



Starter set for circulation mode

5Z 51ITI1X4

EG 18242

Compatible with

5DA 36453

5DA 3945


Activated carbon filter

5Z 51ITB1X4

EG 18243

Compatible with

5DA 394




Activated carbon filter

5Z 9125X1

EC 10671

Compatible with

DR 99/2



Activated carbon filter

5Z 9137X1

EG 18261

Compatible with

JUA 20430




Activated carbon filter

5Z 9114X1

EG 1861

Compatible with
5DB 66753

5DB 66753 5DB 69753 5DS 69770 5DS 99770



Activated carbon filter

5Z 9136X1


G 18471

Compatible with

DD 72556

vecial accessories

Special accessories for extractor fan hoods




Activated carbon filter

5Z 9139X1

EG 18361

Compatible with


5DD 725




Activated carbon filter

5Z 9121X1

EG 18041





Activated carbon filter

5Z 9100X1

EG 18881

Compatible with	
5DL 69654	5DL 66850
5DL 68850	5DL 69850
5DA 46450	



Long-life activated carbon filter

5Z 9100X2

EG 18884

Companiole with		
5DL 69654	5DL 66850	
5DL 68850	5DL 69850	
5DA 46450		

Filter can be cleaned and reused




Long-life activated carbon filter

5Z 9114X2

-G 18081

Compatible with					
5DB 66753	5DB 69753				

Filter can be cleaned and reused several times



Long-life activated carbon filter

5Z 9138X1

EG 18491

Com	pati	ble v	with

5SL 92500

Filter can be cleaned and reused several times



Chimney extension

5Z 9119X1

EG 18612



5DB 69753

upper flue, stainless steel circulation 990 mm



Chimney extension

5Z 9117X3

EG 18887

Compatible with

5DL 69654 5DL 66850 5DL 68850 5DL 69850 upper flue, black, 500 mm




Chimney extension

5Z 9117X4

EG 18888

Compatible with

5DL 69654 5DL 66850 5DL 68850 5DL 69850 unner flue black 990 m




Glass holder

5Z 9301X1

EG 18091

Compatible with

5DF 9276



Tablet holder

5Z 9302X1

EG 18092

Compatible with

5DF 92760



Small parts holder

5Z 9303X1

G 18093

Compatible with

5DF 92760

set of a bleces

Special accessories for dishwashers



Panel strips

5VZ 0BI02 EG 16631

Compatible with 5VF 6X01HVE



Panel strips

5A V10011

Compatible with



Panel strips

5A V10002 EG 16811

Compatible with

5VF 6X01EBE



Panel strips

5A V10022

EG 16861

Compatible with



Panel strips

5Z 9407X1

Compatible with



Cutlery drawer

5Z 1684BS00

Compatible with

5VF 6X01EBE



Extension for aquastop

CZ 7710X0

Compatible with

5VF 6X01EBE

5VF 6X01HVE

5VI 6S01HVE

KITCHEN AND SOUND

The invisible connection of the Blaupunkt worlds Kitchen and Sound – the Blaupunkt Sound System works in the background but with a rich sound. Concealed behind the base cover or installed in cavities, it transforms your kitchen furniture into rhythmic cabinets creating a pulsating entertaining space. These can be connected via Bluetooth technology to compatible devices, connect to your smartphone or tablet.

Blaupunkt Sound System

ZM 100/ZM 101

- Recommended installation behind base cover
- Operated via Bluetooth connection e.g. via smartphone or tablet

Consisting of

- 1 receiver module
- 2/4 exciters (structure-borne sound converter)
- Fastening material
- Connection lines

Technical data - receiver module

- 2×5W loudspeaker outputs, impedance each 4 ohm
- Bluetooth CSR 2.1, compatible with all Bluetooth devices • 240 V AC, max. distance to transmitter 10 m

Technical data - exciter

- Rated load-carrying capacity 6 W
- Impedance 4 ohm
- Installation depth 2.6 cm

Dimensions H × W × D

• 4.5 × 2.8 × 14.0 cm

Multi Control

LED

Air Fry

羔

LED

Air Fry

The extractor fan hood and hob are intelligently linked.

using the hob control panel and automatically adjusts

The innovative LED lights of Blaupunkt extractor fan

hoods ensure even more light on the hob. Another ray of hope: the long-lasting lights consume an extremely low

The hot-air fryer in your oven. Crispy results with little fat.

Heat | Air



Smart slider

An intuitive, simple control concept for all appliances – every setting can be perfectly selected with the Smart Slider.



Touch Control

Precise, innovative and very user-friendly: gently touching the Touch Control buttons is enough to select the desired setting.



Automatic programmes

One touch away from the perfect result: our automatic programmes are equipped for nearly every ingredient. Cooking can't get any easier.



Soft Moving

Thanks to its advanced dampers and hinges, the oven door can be opened and closed smoothly. Just a light pull/push and the door opens or closes gently.



Steam cooking

Cooking with hot steam is gentle to the food, promises maximum taste and a healthy approach to your cooking.



Pyrolyse

With a simple touch, all residues from baking, frying and grilling at high temperatures are reduced to ashes that can be simply wiped away with a cloth.



Hydrolyse

Induction

Easy cleaning at the push of a button: With the aid of heat and steam, even strong soiling can be dissolved.



Industia

burnt. The base of the pan is directly heated by the induction coil. The heat is only produced where it is needed. This means short heat-up times, more safety and much less energy consumption.



Combi induction

Two induction cooking zones can be combined togethe to create one single cooking zone, thereby allowing the use of very large pots and pans. Of course, the two large cooking zones can also be used separately.

Water



Hygiene Plus

An especially high short-term temperature level of 70°C for the antibacterial cleaning of dishes with especially high hygienic requirements (e.g. baby bottles) and households with allergy sufferers.



Info Light

The dot on the floor lights up as a visual programme indicator of when the dishwasher is in operation.



Dosing Assistant

Thanks to the dosing assistant, the detergent tab falls directly into a small collection tray. A targeted jet of water dissolves the tab in a quick, controlled way. The detergent is distributed uniformly throughout the machine.



Aquastop

A lifelong warranty against water damage. The Aquastop safety system prevents all kinds of water damage – whether on the supply hose or due to a leak in the



Vario hinges

Vario hinges eliminate gaps between the various elements of a kitchen. The integrated furniture front moves when it is opened. This prevents the gaps between the fronts of these elements from becoming too large.

Cold



NoFrost

The NoFrost system drains the humidity from the freezer and prevents the formation of ice on the inner walls and hoarfrost on the food.



Super Freezing

With the Super Freezing function, the item is cooled down to -30°C so that newly stored food does not interrupt the freezing process.



Big Box

A highlight: the special Big Box. It is 29cm high and offers an enormous amount of space, e.g. for a large goose, several pizzas or large freezer portions.



Extra Fresh Professional

Both the temperature and humidity are crucial for keeping things fresh for longer. Food in the Extra Fresh Zone is stored at nearly 0°C and therefore stays fresh up to three times longer.



Electronic control

With electronic temperature control, Blaupunkt refrigerations always have the right temperature. It can be read exactly at any time via the digital LED display.



LED light

The long-lasting LED lights are integrated flat in the side walls and illuminate the interior uniformly and perfectly.



BLAUPUNKT SERVICE

Blaupunkt built-in kitchen appliances / customer service, repair service, user advice, spare parts and accessories:

Tel.: 00 800 32 289 000

Manufacturer's warranty

Convincing quality with Blaupunkt warranty.

Blaupunkt kitchen appliances are exclusively produced from the best materials and according to the highest working standards. Blaupunkt provides a three-year manufacturer's warranty on every appliance and every repair carried out by the integrated kitchen appliances customer service.




More original:

Accessories and spare parts.

Original spare parts, extensive accessories and tested detergents and care products can be bought from our competent employees.

You have chosen a piece of premium kitchen equipment with Blaupunkt appliances. Our professional service is available to assist you after the purchase. Our qualified employees are pleased to remain at your disposal. Our customer service experts for Blaupunkt integrated kitchen appliances will professionally answer all questions about the appliances. Here you can obtain all information on handling, functions and performance.

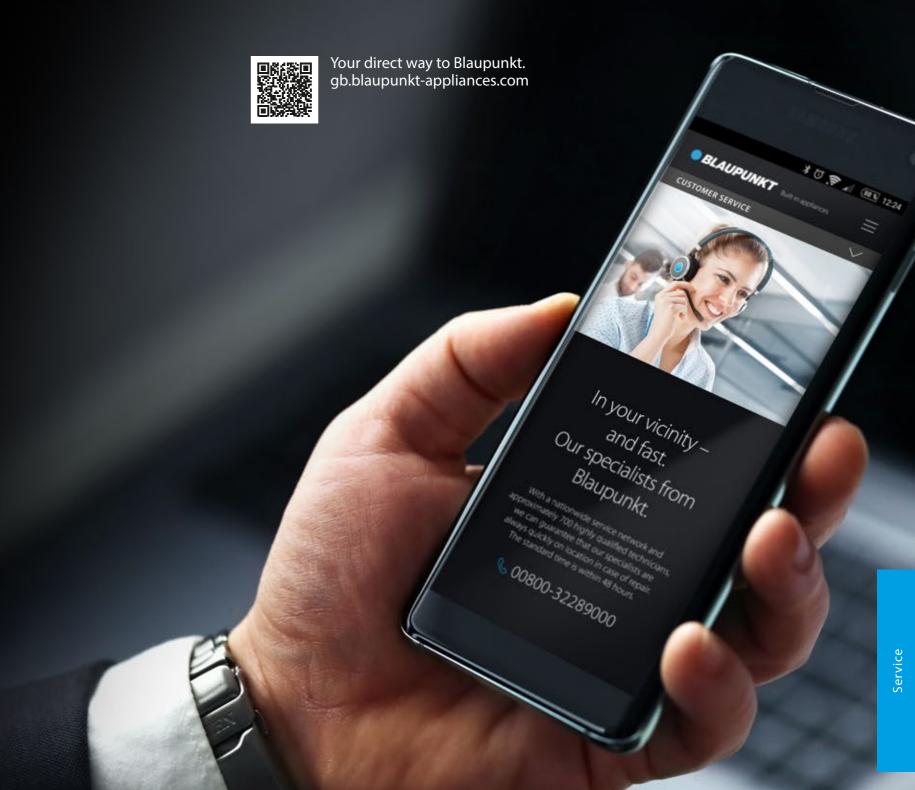



HK Appliances GmbH Werkstraße 3 32289 Rödinghausen (Germany)

www.blaupunkt-einbaugeraete.com

Subject to changes and delivery options as well as minor colour discrepancies in plastic parts.

Registered trademark. © 2023 by Blaupunkt
Reproduction in part or whole only with the permission of the publisher. Printed in Germany 09 / 2023.
No liability for printing errors. Errors and technical changes reserved.